04/2025

BUBLIING M

TECHNICAL SPECIFICATIONS





Flexibility, at its core.


By offering solutions for a wide range of needs, this model is the most flexible — ideal for small meetings for two or for having a complete workspace at your disposal.

- Space for 2 people.
- 비나 Class A soundproofing.
- Guaranteed privacy and comfort.
- \lessapprox Automatic ventilation and lighting.

BUBLIING M | TECHNICAL SPECIFICATIONS

GENERAL DESCRIPTION


Dimensions	Exterior: 2006x1006x2245 mm / 78,98x39,61x88,39 in. With castors: + 52 mm / 2,05 in. With Bubling Fresh Air: + 50 mm / 1,97 in Interior: 1708x974x2060 mm / 67,24x38,35x81,10 in Entry Height: 86 mm / 3,39 in ; With castors: 138 mm / 5,43 in Door: 2108x774 mm / 82,99x30,47 in	
Standard weight	510 kg / 1124 lb.	
Acoustics	Class A dB,A > 30 dB Guaranteed speech level reduction according to ISO 23351-1 testing method, with one of the highest ratings in the industry.	
Sound output	Airflow : 560,8 m³/h (2 fans). Air is renewed, on average, every 5.6 minutes. Airflow can be manually adjusted. In standby mode, the system activates for 10 minutes per hour.	
Lighting	Ceiling Light: LED lighting with a color temperature of 3500K–4000K, providing up to 500 lux on the desk. Lighting is automatic and can be manually adjusted.	
Occupancy indicators	LED sensor technology with exterior red or green light.	
Digital control	7" touchscreen digital control panel.	
Mobility	High-resistance leveling feet adjustable from inside the booth. BUBLIING is prepared for the installation of castors (optional). The leveling feet must be raised to move the booth and lowered once it is in the desired position.	




MATERIALS

Exterior	Exterior panels: Made of powder-coated steel, available in 10 interchangeable colors. Frame and door: Made of matte black lacquered aluminum (RAL 9005) with concealed pivot hinge. Handle: Made of textured black polymer. Glass: 8 mm / 0.31 in clear acoustic glass.
Interior	 Structure: Metal frame, wood, and recycled acoustic foam. Covering: 100% polyester fabric available in 12 colors. Flooring: 100% polyamide carpet available in 4 colors. Table: Birch plywood top with white, black fingerprint-resistant thermolaminate, or wood imitation finish. Metal support structure.
Standard furniture	Table Dimensions: 745x700x730 mm / 29,33x27,56x28,74 in.Table Height: 730 ou 1050 mm / 28,74 ou 41,34 in.Maximum load for the table is 50 kg / 110.23 lbs.Sofa Dimensions: 730x570x810 mm / 28,74x22,44x31,89 in.Sofa upholstered in 100% polyester fabric, available in 12 colors.Clothes hangers (2): lacquered in textured black RAL 9005.
Furniture options	High stools: 400x400x 580-780 mm / 15.75x15.75x22.83-30.71 in. This optional piece is upholstered in 100% polyester fabric, available in 12 colors. Maximum load for the sea is 135 kg / 297.12 lbs.

With sofa:



With high stools:



BUBLIING M | TECHNICAL SPECIFICATIONS

SAFETY

Fire protection	All coating materials, upholstery, and acoustic materials used in our products are tested and classified according to national or international standards.	
	Fabrics: EN 13501-1 Adhered Class B, s1, d0. Foams: ISO 3795. Carpet: EN 13501-1 Cfl – s1. Wood: EN 13986, Class D-s2, d0.	
Seismic protection	The BUBLIING can be supplied with a system that allows attachment to the floor, available for seismic regions.	

ENERGY


Charger output	2x Schuko sockets - 230 V. 1x USB-C port. 1x USB-A port. Optional: RJ45 Network socket; HDMI input.
Equipment power	60 W.
Standby consumption	0,74 W.
Standard consumption	AC output (electrical socket); 100-240 VAC, 16 A, 50-60 Hz.
Electrical equipment	65 W USB-C output.

EXTRA FEATURES

Options	Metal hydraulic air spring for door closer.
	High load capacity castors. Castors and leveling feet are adjustable from
	inside the BUBLIING.
	Sofa cushion upholstered in 100% polyester fabric, available in 12 colours.
	Bubliing Fresh Air system, non-adjustable and noise-free.
	Metal interior monitor stand with VESA mounting. Monitor not included.
	Maximum monitor size is 13-42 inches.

SPACE AND INSTALLATION

		200
Required Space	BUBLIING depth 1006 mm / 39.61 in + 100° door opening. Minimum recommended clearance for air circulation above and on the sides 150	
	mm / 5.91 in.	
Installation Space	Installation requires 500 mm / 19.69 in of free space around the BUBLIING.	
Assembly	Assembly time: 1 hour. Number of people: 2 people.	



BUBLIING M | STANDARD FURNITURE





LOW TABLE 745x700x730 mm. 29,33x27,56x28,74 in.




SOFAS 730x570x810 mm. 28,74x22,44x31,89 in.



CLOTHES HANGERS 2 units.

BUBLIING M | OPTIONAL FURNITURE

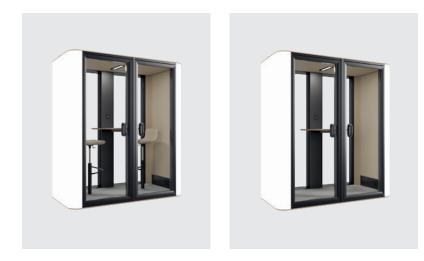



HIGH TABLE 745x700x1050 mm. 29,33x27,56x41,34 in.



HIGH STOOL 400x400x580-780 mm. 15,75x15,75x22,83-30,71 in.

BUBLIING M | STANDARD FEATURES



CONNECTIVITY 2x Schuko sockets - 230 V. 1x USB-C port. 1x USB-A port.



CONTROL SCREEN 7-inch digital control.



OCCUPANCY INDICATOR Exterior LED sensor technology. 2 units.

BUBLIING M | OPTIONAL FEATURES



CASTERS High load capacity. Adjustment is made from the inside.



AIR SPRING Metal hydraulic system for the door.



SOFA CUSHION Covered with 100% polyester fabric. 12 colors available.



INDOOR MONITOR STAND Monitor not included. Size: 13-42 inches.



BUBLIING FRESH AIR Non-adjustable system. Noise-free.



BUBLIING M | FINISHES

INTERIOR FINISH



EXTERIOR COATING



INTERIOR FLOORING



TABLE TOP



Plywood with white laminated





Due to the different monitor and printer configurations, the appearance of the finishes may vary from the actual finish. To ensure that the chosen finishes meet your expectations, please refer to physical samples or contact a BUBLIING representative.

WORK WELL, LIVE BETTER WITH **BUBLIING M**

WWW.BUBLIING.COM