BUBLIING R

TECHNICAL SPECIFICATIONS





At every step, a space without limits.

As the largest of all models, this BUBLIING redefines the boundaries of flexibility and mobility.

Its innovation provides freedom of movement by offering a space that adapts to various layouts.

- A space for 8 people.
- ।।। Class A soundproofing.
- Guaranteed privacy and comfort.
- \lessapprox Automatic ventilation and lighting.
- 🖒 Designed for PRM.

1

BUBLIING R | TECHNICAL SPECIFICATIONS

GENERAL DESCRIPTION

Dimensions Exterior: 3000x3000x2245 mm / 118,11x118,11x88,39 in.

Interior: 2708x2976x2114 mm / 106,61x117,17x83,23 in.

Entry Height: 23 mm / 0,91 in. Door: 2134x949 mm / 83,90x37,36 in.

Standard weight 1120 kg / 2467 lb.

Class A | dB,A > 30 dB. Acoustics

> Guaranteed speech level reduction according to ISO 23351-1 testing method, with one of the highest ratings in the industry.

Fan flow rate Airflow: 1402 m3/h (10 fans).

Air is renewed, on average, every 5.6 minutes.

Airflow can be manually adjusted.

In standby mode, the system activates for 10 minutes per hour.

Ceiling Light: LED lighting with a color temperature of Lighting

3500K-4000K, providing up to 500 lux on the desk. Lighting is automatic and can be manually adjusted.

Occupancy indicators LED sensor technology with exterior red or green light.


Digital control 7" touchscreen digital control panel.

High-resistance leveling feet adjustable from inside the booth. Mobility

BUBLIING is designed to accommodate people with reduced

mobility and wheelchair users.

Ramp with an entry height of 23 mm / 0.91 in.



MATERIALS

Exterior Exterior panels: Made of powder-coated steel, available in 10

interchangeable colors.

Frame and door: Made of matte black lacquered aluminum (RAL

9005) with concealed pivot hinge. Handle: Made of textured black polymer. Glass: 8 mm / 0.31 in clear acoustic glass.

Structure: Metal frame, wood, and recycled acoustic foam. Interior

Covering: 100% polyester fabric available in 12 colors. Flooring: 100% polyamide carpet available in 4 colors.

Table: Birch plywood top with white, black fingerprint-resistant

thermolaminate, or wood imitation finish.

Metal support structure.

Table dimensions (8 people): 1800x1000x730 mm / 70,87x39,37x28,74 in. Standard furniture

> Table Height: 730 ou 1050 mm / 28,74 ou 41,34 in. Maximum load for the table is 50 kg / 110.23 lbs.

Clothes hangers (4): lacquered in textured black RAL 9005.

Table dimensions (6 people): 1400x1000x730 mm / 55,12x39,37x28,74 in.

Table Height: 730 ou 1050 mm / 28,74 ou 41,34 in. Maximum load for the table is 50 kg / 110.23 lbs.

Clothes hangers (4): lacquered in textured black RAL 9005.

PRM kit This model is designed to meet the needs of people with reduced

mobility (PRM). Please refer to the PRM kit technical sheet for

additional details.

Table for 8 people:





Table for 6 people:



BUBLIING R | TECHNICAL SPECIFICATIONS

SAFETY

products are tested and classified according to national or

international standards.

Fabrics: EN 13501-1 Adhered Class B, s1, d0.

Foams: ISO 3795. Carpet: EN 13501-1 Cfl – s1. Wood: EN 13986, Class D-s2, d0.

Seismic protection The BUBLIING can be supplied with a system that allows attachment

to the floor, available for seismic regions.

ENERGY

Charger output 4x Schuko sockets - 230V.

1x USB-C port. 1x USB-A port. 1x RJ45 network socket. Optional: HDMI port.

Equipment power 176 W.

Standby consumption 0,98 W.

Standard consumption AC output (electrical socket); 100-240 VAC, 16 A, 50-60 Hz.

Electrical equipment 65 W USB-C output.

EXTRA FEATURES

Options Metal hydraulic air spring for door closer.

Metal interior monitor stand with VESA mounting. Monitor not included.

Maximum monitor size is 13-42 inches.

 $\label{thm:monitor stand} \mbox{Metal exterior monitor stand with VESA mounting.} \mbox{Monitor not included}.$

Maximum monitor size is 37-70 inches.

 $\begin{array}{c} \textbf{Indoor whiteboard} \ 1595x910 \ mm \ / \ 62,80x35,83 \ in \\ \textbf{Outdoor whiteboard} \ \ 2000x910 \ mm \ / \ 78,74x35,83 \ in \\ \end{array}$

SPACE AND INSTALLATION

Space and Installation BUBLIING depth 3000 mm / 118,11 in + Door opening of 100°.

Minimum recommended airflow space above and on the sides: 150


mm / 5.91 in.

Required Space Installation requires 500 mm / 19.69 in of free space around the

BUBLIING.

Assembly Assembly time: 4 hours.

Number of people: 3 people.



BUBLIING R | STANDARD FURNITURE





LOW TABLE FOR 8 PEOPLE 1800x1000x730 mm. 70,87x39,37x28,74 in.



CLOTHES HANGERS 4 units.





HIGH TABLE FOR 8 PEOPLE 1800x1000x1050 mm. 70,87x39,37x41,344 in.



CLOTHES HANGERS 4 units.

BUBLIING R | OPTIONAL FURNITURE





LOW TABLE FOR 6 PEOPLE 1400x1000x730 mm. 55,12x39,37x28,74 in.



CLOTHES HANGERS 4 units.





HIGH TABLE FOR 6 PEOPLE 1400x1000x1050 mm. 55,12x39,37x41,34 in.



CLOTHES HANGERS 4 units.

BUBLIING R | STANDARD FEATURES



CONNECTIVITY

4x standard Schuko sockets - 230 V. 1x USB-C port. 1x USB-A port. 1x RJ45 network socket.



CONTROL SCREEN

7-inch digital control.



OCCUPANCY INDICATOR

Exterior LED sensor technology. 2 units.

BUBLIING R | OPTIONAL FEATURES



AIR SPRING

Metal hydraulic system for the door.



INDOOR MONITOR STAND

Monitor not included. Size: 13-42 inches.



OUTDOOR MONITOR STAND

Monitor not included. Size: 37-70 inches.




INDOOR WHITEBOARD

1595x910 mm. 62,80x35,83 in.



OUTDOOR WHITEBOARD

2000x910 mm. 78,74x35,83 in.

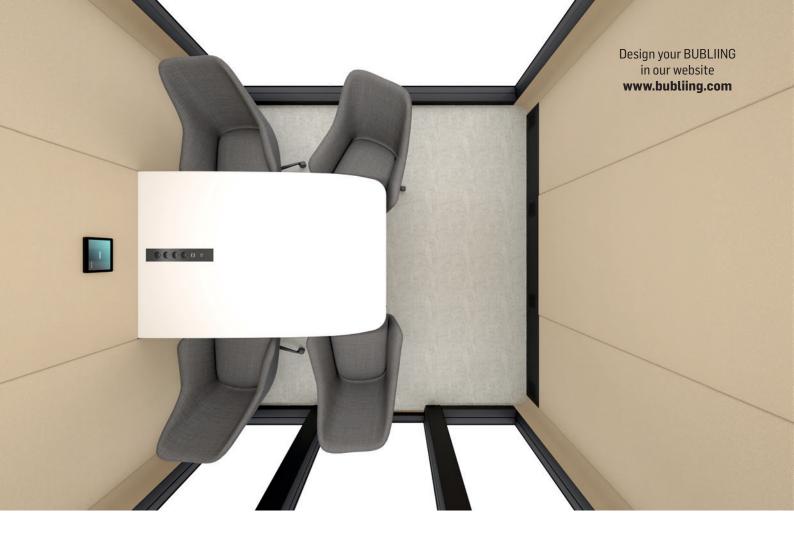

BUBLIING R | FINISHES



TABLE TOP



Due to the different monitor and printer configurations, the appearance of the finishes may vary from the actual finish. To ensure that the chosen finishes meet your expectations, please refer to physical samples or contact a BUBLIING representative.

WORK WELL, LIVE BETTER
WITH **BUBLIING R**