

BUBLING




A SPACE FOR EVERYONE



BUBLING enhances the environments where people work by reducing noise and privacy issues in offices and other spaces. Since 2018, we have been dedicated to creating more comfortable, attractive, and functional products, believing that with them, people can achieve more and perform better. Our product family is made from durable and renewable materials, designed for a long lifespan and sustainability. Committed to finding solutions for success in the workplace, we are strongly focused on researching and developing the best options, always responding to the needs of our users.



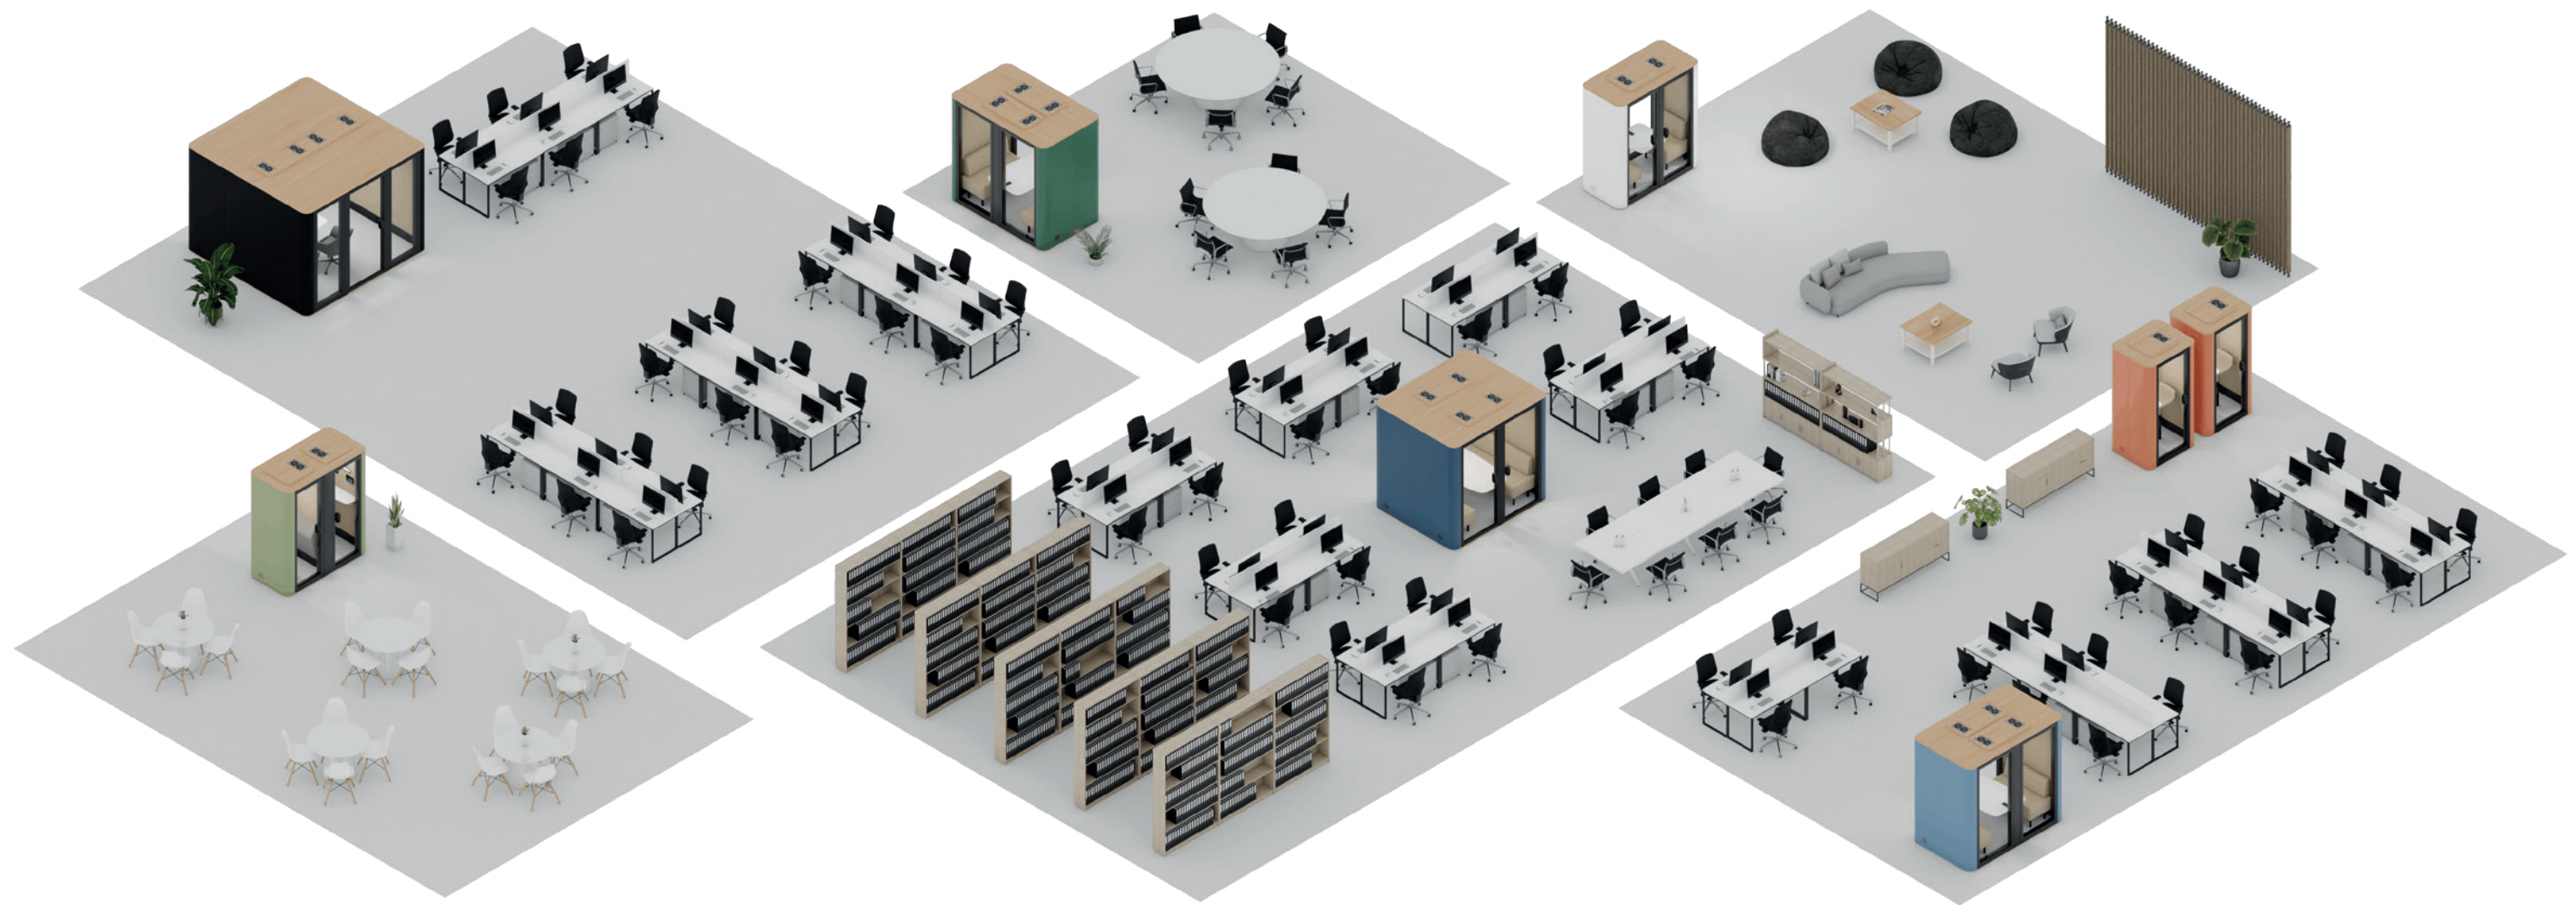

A SPACE FOR EVERYONE

THE NEW ERA IN THE WORKPLACE

Office design is currently undergoing rapid and constant transformation.

This change is not just a temporary response to recent events but a reflection of broader shifts in the world of work.

In recent years, open-space offices have been promoted as the ideal work environments, a trend driven primarily by cost savings. With the rise of remote and flexible work, offices have had to reinvent themselves, offering more dynamic, adaptable spaces that are primarily focused on people and their needs.

Investing in the basics is crucial when redefining modern offices. Making them resemble a home-like environment has not only become the most widely used strategy for attracting employees worldwide but also enhances productivity and well-being. However, with technological advancements and the rise of hybrid teams, workdays are increasingly filled with virtual meetings, making open-space offices less efficient and productive due to increased noise and lack of privacy. This negatively impacts both productivity and individual satisfaction within



According to Passive Secrets, it is estimated that **75% of workers face distractions** in the workplace, significantly hindering productivity. Studies show that distractions can reduce productive time to less than **60%**.

organizations. The biggest challenge for companies is finding a balance between promoting collaborative work while also providing conditions that ensure individuality and concentration for their employees. The future of offices lies in a combination of open spaces, private zones for focus and privacy, and social areas that foster creativity and innovation. Each employee has different needs: while some thrive in constant idea exchange within social environments, others require quieter spaces where they can concentrate more intensely on individual tasks.


The harmony between individual well-being and collective performance is essential for a company to achieve high levels of efficiency and sustainability. Offices should be spaces that people want to return to, not out of obligation, but from a genuine desire to work for the company.

When the environment is welcoming, inspiring, and centered on the individual, a natural bond is created between the employee and the organization.



A SPACE FOR EVERYONE

OUR IDEAL SOLUTION

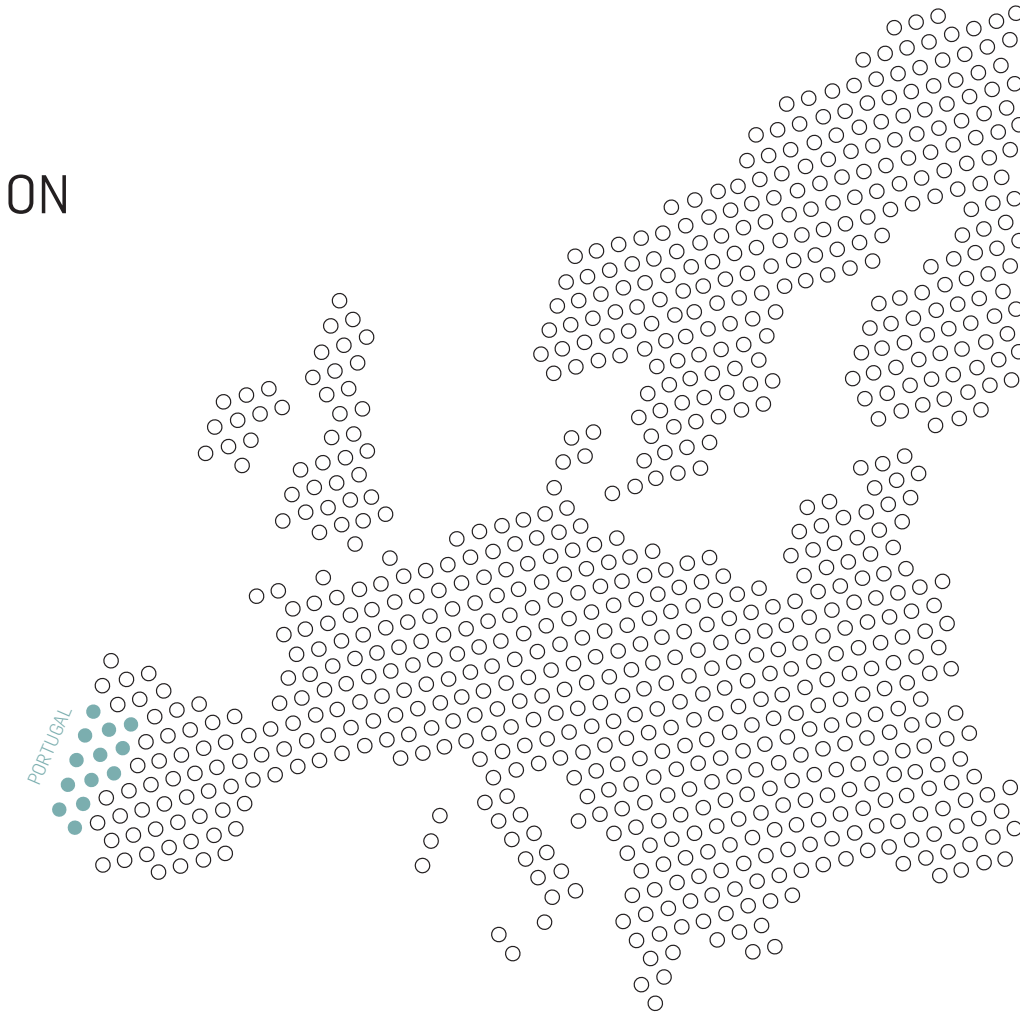

We all know how the mind loses focus and clarity after hours of work and constant distractions. How many times have you had to search for meeting rooms at the last minute, quiet spaces to take calls, or simply an area to focus without distractions?

BUBLIING is a brand designed and produced in Portugal, born out of a real and personal need. The problem was clear to us, which is why in 2018, we began designing our first BUBLIING.

We wanted to create a solution that provided the comfort necessary to focus. A space where we could be creative without distractions.

A space where we could do more and do it better.

Since then, our main focus has been to create spaces where people can feel like the best version of themselves.

And we succeeded. We now offer several models that are the result of a perfect combination of advanced technology, high-quality materials, and user-focused design.

Each BUBLIING is a personal retreat, ideal for calls, meetings, or simply moments of concentration.

We know that a harmonious work environment makes all the difference in productivity and well-being. That's why we have been committed, from the very beginning, to producing products that truly transform your workspace and make a difference.

WELCOME TO YOUR BUBLIING.

SOUNDPROOF - CLASE A

>30dB

Guaranteed reduction in speech level according to the ISO 23351-1 testing method, with one of the best ratings in the industry.

SPECIFIC AIRFLOW RATE

21,3 h⁻¹

Value determined in the laboratory according to the ISO 12569:2017.

The air is renewed, on average, every 5.6 minutes. In standby mode, the system activates for 10 minutes per hour.

LIGHTING

3500K-4000K

Adjustable lighting with LED temperature 3500K-4000K. Lighting up to 500 lux on the table.

A SPACE FOR EVERYONE

THE FIRST STEP TO SILENCE AND FOCUS.

SIMPLICITY

We designed BUBLIING with the goal of simplifying everything to ensure an uncomplicated and satisfying experience. That's why we developed a modular design that allows for quick and intuitive assembly, ensuring not only practicality but also durability and comfort.

UNIVERSAL

Design crafted to adapt to various scenarios and be personalized according to your preferences. For us, there are two limitless truths: your creativity and our ability to meet your desires and needs.

We aim to offer solutions that go beyond your expectations, creating environments that truly represent your vision.

PRIVACY

Soundproof spaces, tested in accredited laboratories, ensure privacy and comfort, providing an ideal environment for productive work, phone calls, or virtual meetings. These acoustic isolation solutions create a distraction-free space, allowing clear and effective communication, which is essential for your daily performance.

COMFORT

Features such as ventilation, lighting, and acoustics are essential factors for user comfort and well-being. The continuous improvement of these elements and the constant pursuit of new solutions and technologies are among our main focuses.

CONNECTIVITY

The interior of BUBLIING has been designed in detail to provide everything you need, including connectivity. It is equipped with strategically placed power outlets and suitable supports for your meetings and video conferences, ensuring that communication is smooth and efficient.

ECONOMIC

A BUBLIING has lower costs compared to building a traditional, fixed meeting room. Additionally, assembly is quick, and its flexibility allows it to easily adapt to different spaces. With replaceable parts and the possibility of being transported during relocations, it offers a practical, economical, and sustainable solution without compromising functionality and comfort.



A SPACE FOR EVERYONE
WORK WELL, LIVE BETTER

S



A SPACE FOR 1 PERSON

Being the smallest of all models, it is perfect for providing you with full privacy for your phone calls, video meetings, or other small individual tasks.

EXT 1206x1006x2245 mm	INT 914x974x2060 mm
EXT 47,48x39,61x88,43 in	INT 35,89X38,31X81,10 in



MODEL | BUBLIING S

SMALL IN SIZE, HUGE IN SOLUTIONS.



GUARANTEED PRIVACY

Structure with a workspace that offers acoustic insulation >30dB Class A.

This ensures that external noise won't disturb you, and due to its internal acoustics, it provides a private and comfortable space.



ENHANCED VENTILATION

Ventilation system with adjustable airflow that can be quickly and intuitively controlled according to your needs. In standby mode, the fans operate for 10 minutes per hour to ensure the air is always refreshed.



AUTOMATIC LIGHTING

LED lighting that can also be easily and quickly adjusted between 3500K-4000K according to your needs. BUBLIING detects when it is occupied and automatically notifies with an occupancy indicator, green or red.



UNLIMITED CONNECTIVITY

It offers 1 standard SCHUKO outlet and 1 USB-C port, ensuring you are always connected, whether for charging your devices or using electronic appliances with ease.

BUBLIING S | STANDARD FURNITURE



HIGH TABLE
730x400x1050 mm.
28,74x15,75x41,34 in.



CLOTHES HANGER
1 unit.


BUBLIING S | STANDARD FEATURES



CONNECTIVITY
1x standard Schuko socket - 230 V.
1x USB-C port.



CONTROL SCREEN
7-inch digital control.



OCCUPANCY INDICATOR
Exterior LED sensor technology.
2 units.

BUBLIING S | OPTIONAL FURNITURE



LOW TABLE
730x400x730 mm.
28,74x15,75x28,74 in.



SOFA
730x570x450 mm.
28,74x22,44x17,72 in.



HIGH STOOL
400x400x580-780 mm.
15,75x15,75x22,83-30,71 in.



BACKREST
570x145x760 mm.
22,44x5,71x29,92 in.

BUBLIING S | OPTIONAL FEATURES



CASTERS
High load capacity.
Adjustment is made from the inside.



AIR SPRING
Metal hydraulic system for the door.



WIRELESS CHARGER
Invisible charger built into the table.



FACIAL LIGHT
LED lighting 3500 K - 4000 K.
Up to 500 lux on the user's face.




LIFTING TABLE
Height adjustable system:
730-1200 mm / 28.74x47.24 in.



SOFA CUSHION
Covered with 100% polyester fabric.
12 colors available.



BUBLIING FRESH AIR
Non-adjustable system.
Noise-free.

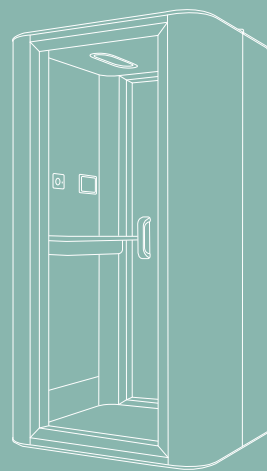


MODELO BUBLIING S
TECHINICAL SPECIFICATIONS



BUBLIING S | TECHNICAL SPECIFICATIONS


GENERAL DESCRIPTION

Dimensions	Exterior: 1206x1006x2245 mm / 47,48x39,61x88,39 in. With castors: + 52 mm / 2,05 in. With Bubliing Fresh Air: +50 mm / 1,97 in. Interior: 914x974x2060 mm / 35,98x38,35x81,10 in. Entry Height: 86 mm / 3,39 in ; With castors: 138 mm / 5,43 in. Door: 2108x825 mm / 82,99x32,48 in.
Standard weight	360 kg / 794 lb.
Acoustics	Class A I dB,A >30 dB. Guaranteed speech level reduction according to ISO 23351-1 testing method, with one of the highest ratings in the industry.
Sound output	Sound impact produced by the ventilation system. Interior: 36 dB at head height. Exterior: 25 dB at a distance of 1 meter. Test conducted according to ISO 11201:2010.
Fan flow rate	Airflow: 280.4 m³/h (2 fans). Air is renewed, on average, every 5.6 minutes. Airflow can be manually adjusted. In standby mode, the system activates for 10 minutes per hour.
Lighting	Ceiling Light: LED lighting with a color temperature of 3500K–4000K, providing up to 500 lux on the desk. Face Light: LED lighting with a color temperature of 3500K–4000K, providing up to 500 lux on the user's face. Lighting is automatic and can be manually adjusted.
Occupancy indicators	LED sensor technology with exterior red or green light.
Digital control	7" touchscreen digital control panel.
Mobility	High-resistance leveling feet adjustable from inside the booth. BUBLIING is prepared for the installation of castors (optional). The leveling feet must be raised to move the booth and lowered once it is in the desired position.

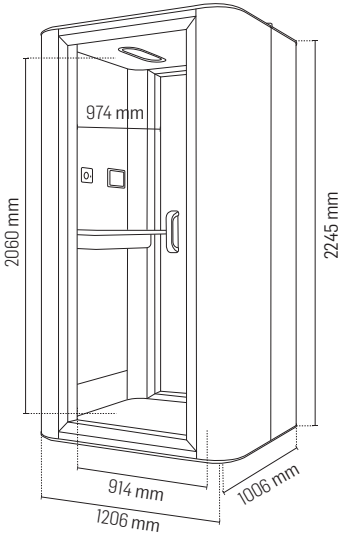

MATERIALS

Exterior	Exterior panels: Made of powder-coated steel, available in 10 interchangeable colors. Frame and door: Made of matte black lacquered aluminum (RAL 9005) with concealed pivot hinge. Handle: Made of textured black polymer. Glass: 8 mm / 0.31 in clear acoustic glass.
Interior	Structure: Metal frame, wood, and recycled acoustic foam. Covering: 100% polyester fabric available in 12 colors. Flooring: 100% polyamide carpet available in 4 colors. Table: Birch plywood top with white, black fingerprint-resistant thermolaminate, or wood imitation finish. Metal support structure.
Standard furniture	Table Dimensions: 730 x 400 x 1050 mm / 28.74 x 15.75 x 41.34 in. Table Height: 730 or 1050 mm / 28.74 or 41.34 in. Maximum load for the table is 50 kg / 110.23 lbs. Clothes hanger (I): lacquered in textured black RAL 9005.
Furniture options	Sofa: 730 x 570 x 450 mm / 28.74 x 22.44 x 17,72 in. High stool: 400 x 400 x 580-780 mm / 15.75 x 15.75 x 22.83-30.71 in. Backrest: 570 x 145 x 760 mm / 22.44 x 5.71 x 29.92 in. These optional pieces are upholstered in 100% polyester fabric, available in 12 colors. Maximum load for the sea is 135 kg / 297.12 lbs.

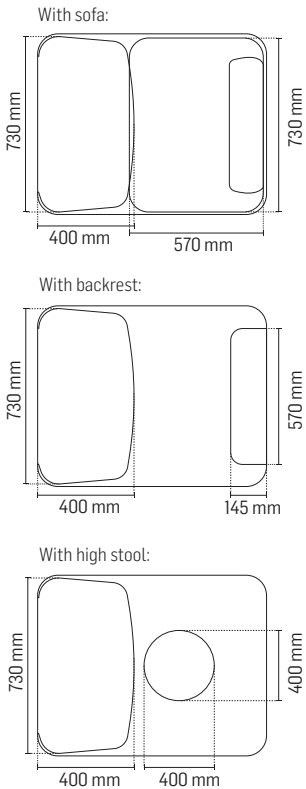

BUBLIING S | TECHNICAL SPECIFICATIONS

SAFETY

Fire protection	All coating materials, upholstery, and acoustic materials used in our products are tested and classified according to national or international standards. Fabrics: EN 13501-1 Adhered Class B, s1, d0. Foams: ISO 3795. Carpet: EN 13501-1 Cfl – s1. Wood: EN 13986, Class D-s2, d0.
Seismic protection	The BUBLIING can be supplied with a system that allows attachment to the floor, available for seismic regions.

ENERGY


Charger output	1x Schuko socket – 230 V. 1x USB-C port. Optional: USB-A port, RJ45 network socket.
Equipment power	30 W.
Standby consumption	0,74 W.
Standard consumption	AC output (power socket); 100–240 VAC, 16 A, 50–60 Hz.
Electrical equipment	18 W USB-C output.

EXTRA FEATURES

Options	Metal hydraulic air spring for door closer. Invisible wireless charger integrated into the table. High load capacity castors. Castors and leveling feet are adjustable from inside the BUBLIING. Adjustable facial light up to 500 lux directed at the user's face. Bubliing Fresh Air system, non-adjustable and noise-free. Sofa cushion upholstered in 100% polyester fabric, available in 12 colours. Height-adjustable lift table system, from 730 to 1200 mm / 28.74 x 47.24 in.
---------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

SPACE AND INSTALLATION

Required Space	BUBLIING depth 1006 mm / 39.61 in + 100° door opening. Minimum recommended clearance for air circulation above and on the sides 150 mm / 5.91 in.
Installation Space	Installation requires 500 mm / 19.69 in of free space around the BUBLIING.
Assembly	Assembly time: 30 minutes. Number of people: 2 people.

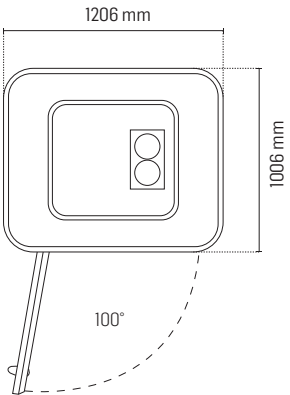



A TWICE SPACE FOR 1 PERSON

Combines two BUBLING units, allowing two people to use them simultaneously and individually, performing tasks without compromising privacy while optimizing space.

EXT 2006x1006x2245 mm	INT 778x974x2060 mm
EXT 78,98x39,61x88,43 in	INT 30,63X38,31X81,10 in



MODEL | BUBLIING Stwin

TWICE THE PRIVACY, THE SAME EFFICIENCY.



GUARANTEED PRIVACY

Structure with a workspace that offers acoustic insulation >30dB Class A. This ensures that external noise won't disturb you, and due to its internal acoustics, it provides a private and comfortable space.



ENHANCED VENTILATION

Ventilation system with adjustable airflow that can be quickly and intuitively controlled according to your needs. In standby mode, the fans operate for 10 minutes per hour to ensure the air is always refreshed.



AUTOMATIC LIGHTING

LED lighting that can also be easily and quickly adjusted between 3500K-4000K according to your needs. BUBLIING detects when it is occupied and automatically notifies with an occupancy indicator, green or red.



UNLIMITED CONNECTIVITY

It offers 1 standard SCHUKO outlet and 1 USB-C port in each space, ensuring you are always connected, whether for charging your devices or using electronic appliances with ease.

BUBLIING Stwin | STANDARD FURNITURE



HIGH TABLE
730x350x1050 mm.
28,74x13,78x41,34 in.



CLOTHES HANGER
1 unit in each space.


BUBLIING Stwin | STANDARD FEATURES



CONNECTIVITY
1x standard Schuko socket - 230 V.
1x USB-C port.



CONTROL SCREEN
7-inch digital control.

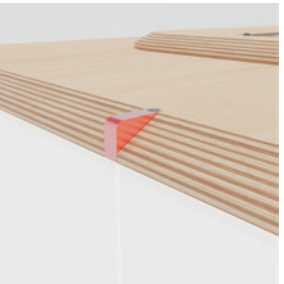

OCCUPANCY INDICATOR
Exterior LED sensor technology.
2 units.

BUBLIING Stwin | OPTIONAL FURNITURE



HIGH STOOL
400x400x580-780 mm.
15,75x15,75x22,83-30,71 in.



BACKREST
570x145x760 mm.
22,44x5,71x29,92 in.

BUBLIING Stwin | OPTIONAL FEATURES



CASTERS
High load capacity.
Adjustment is made from the inside.



AIR SPRING
Metal hydraulic system for the door.




WIRELESS CHARGER
LED lighting 3500 K - 4000 K.
Up to 500 lux on the user's face.



FACIAL LIGHT
Invisible charger built into the table.



LIFTING TABLE
Height adjustable system:
730-1200 mm / 28.74x47.24 in.

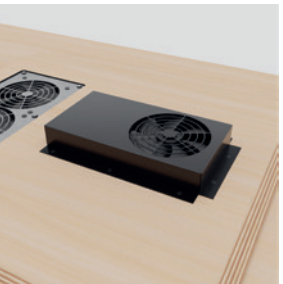

BUBLIING FRESH AIR
Non-adjustable system.
Noise-free.




MODELO BUBLIING Stwin
TECHINICAL SPECIFICATIONS



BUBLIING Stwin | TECHNICAL SPECIFICATIONS


GENERAL DESCRIPTION

Dimensions	Exterior: 2006x1006x2245 mm / 78,98x39,61x88,39 in. With castors: + 52 mm / 2,05 in. With Bubliing Fresh Air: +50 mm / 1,97 in. Interior: 778x974x2060 mm / 30,63x38,35x81,10 in. Entry Height: 86 mm / 3,39 in ; With castors: 138 mm / 5,43 in. Door: 2108x689 mm / 82,99x27,13 in.
Standard weight	590 kg / 1300 lb.
Acoustics	Class A dB,A >30 dB. Guaranteed speech level reduction according to ISO 23351-1 testing method, with one of the highest ratings in the industry.
Sound output	Sound impact produced by the ventilation system. Interior: 36 dB at head height. Exterior: 25 dB at a distance of 1 meter. Test conducted according to ISO 11201:2010.
Fan flow rate	Airflow: 560,8 m³/h (4 fans). Air is renewed, on average, every 5.6 minutes. Airflow can be manually adjusted. In standby mode, the system activates for 10 minutes per hour.
Lighting	Ceiling Light: LED lighting with a color temperature of 3500K–4000K, providing up to 500 lux on the desk. Face Light: LED lighting with a color temperature of 3500K–4000K, providing up to 500 lux on the user's face. Lighting is automatic and can be manually adjusted.
Occupancy indicators	LED sensor technology with exterior red or green light.
Digital control	7" touchscreen digital control panel.
Mobility	High-resistance leveling feet adjustable from inside the booth. BUBLIING is prepared for the installation of castors (optional). The leveling feet must be raised to move the booth and lowered once it is in the desired position.

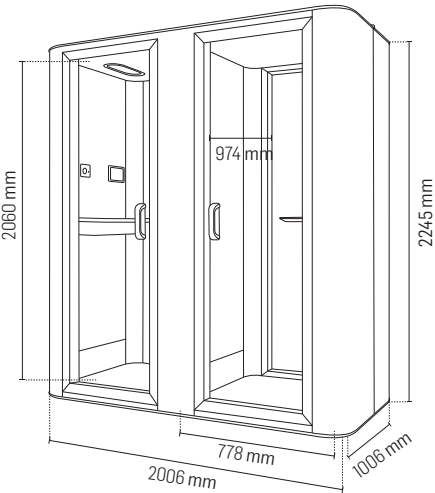

MATERIALS

Exterior	Exterior panels: Made of powder-coated steel, available in 10 interchangeable colors. Frame and door: Made of matte black lacquered aluminum (RAL 9005) with concealed pivot hinge. Handle: Made of textured black polymer. Glass: 8 mm / 0.31 in clear acoustic glass.
Interior	Structure: Metal frame, wood, and recycled acoustic foam. Covering: 100% polyester fabric available in 12 colors. Flooring: 100% polyamide carpet available in 4 colors. Table: Birch plywood top with white, black fingerprint-resistant thermolaminate, or wood imitation finish. Metal support structure.
Standard furniture	Table Dimensions: 730x350x1050 mm / 28,74x13,78x41,34 in. Table Height: 1050 mm / 41,34 in. Maximum load for the table is 50 kg / 110.23 lbs. Clothes hanger (l): lacquered in textured black RAL 9005.
Furniture options	High stool: 570x145x760 mm / 22,44x5,71x29,92 in. Backrest: 400x400x580-780 mm / 15,75x15,75x22,83-30,71 in. These optional pieces are upholstered in 100% polyester fabric, available in 12 colors. Maximum load for the seat is 135 kg / 297.12 lbs.

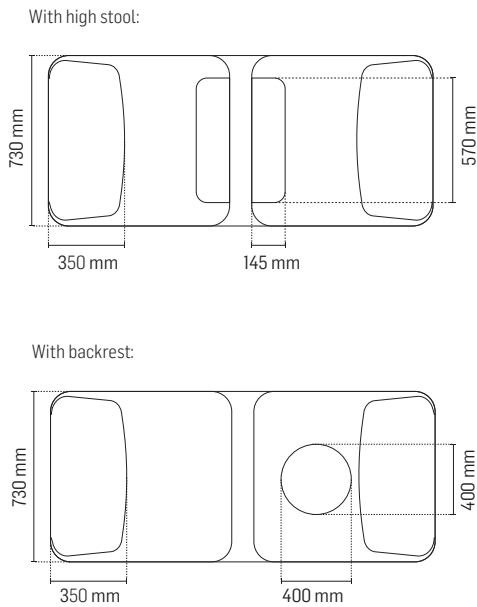

BUBLIING Stwin | TECHNICAL SPECIFICATIONS

SAFETY

Fire protection	All coating materials, upholstery, and acoustic materials used in our products are tested and classified according to national or international standards. Fabrics: EN 13501-1 Adhered Class B, s1, d0. Foams: ISO 3795. Carpet: EN 13501-1 Cfl – s1. Wood: EN 13986, Class D-s2, d0.
Seismic protection	The BUBLIING can be supplied with a system that allows attachment to the floor, available for seismic regions.

ENERGY


Charger output	In each booth. 1x Schuko socket – 230 V. 1x USB-C port. Optional: USB-A port, RJ45 network socket.
Equipment power	60 W.
Standby consumption	0,98 W.
Standard consumption	AC output (power socket); 100–240 VAC, 16 A, 50–60 Hz.
Electrical equipment	18 W USB-C output.

EXTRA FEATURES

Options	Metal hydraulic air spring for door closer. Invisible wireless charger integrated into the table. High load capacity castors. Castors and leveling feet are adjustable from inside the BUBLIING. Adjustable facial light up to 500 lux directed at the user's face. Bubliing Fresh Air system , non-adjustable and noise-free. Height-adjustable lift table system , from 730 to 1200 mm / 28.74 x 47.24 in.
---------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

SPACE AND INSTALLATION

Required Space	BUBLIING depth 1006 mm / 39.61 in + 100° door opening. Minimum recommended clearance for air circulation above and on the sides 150 mm / 5.91 in.
Installation Space	Installation requires 500 mm / 19.69 in of free space around the BUBLIING.
Assembly	Assembly time: 1 hour. Number of people: 2 people.

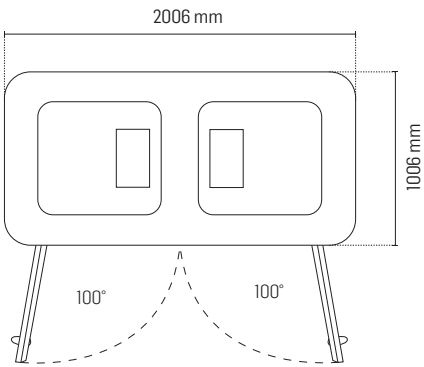

M



A SPACE FOR TWO PEOPLE

For providing solutions for the most diverse needs, this model is the most flexible, ideal for holding small meetings for two or having a complete workspace at your disposal.

EXT 2006x1006x2245 mm	INT 1708x974x2060 mm
EXT 78,98x39,61x88,43 in	INT 67,24x38,31x81,10 in



MODEL | BUBLIING M

FLEXIBILITY AT ITS CORE.



GUARANTEED PRIVACY

Structure with a workspace that offers acoustic insulation >30dB Class A. This ensures that external noise won't disturb you, and due to its internal acoustics, it provides a private and comfortable space.



ENHANCED VENTILATION

Ventilation system with adjustable airflow that can be quickly and intuitively controlled according to your needs. In standby mode, the fans operate for 10 minutes per hour to ensure the air is always refreshed.



AUTOMATIC LIGHTING

LED lighting that can also be easily and quickly adjusted between 3500K-4000K according to your needs. BUBLIING detects when it is occupied and automatically notifies with an occupancy indicator, green or red.



UNLIMITED CONNECTIVITY

It offers 2 standard SCHUKO outlets, 1 USB-C port, and 1 USB-A port, ensuring you are always connected, whether for charging your devices or using electronic appliances with ease.

BUBLIING M | STANDARD FURNITURE



LOW TABLE
745x700x730 mm.
29,33x27,56x28,74 in.



SOFAS
730x570x450 mm.
28,74x22,44x17,72 in.



CLOTHES HANGERS
2 units.


BUBLIING M | STANDARD FEATURES



CONNECTIVITY
2x Schuko sockets - 230 V.
1x USB-C port.
1x USB-A port.



CONTROL SCREEN
7-inch digital control.

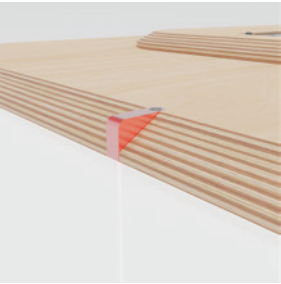

OCCUPANCY INDICATOR
Exterior LED sensor technology.
2 units.

BUBLIING M | OPTIONAL FURNITURE



HIGH TABLE
745x700x1050 mm.
29,33x27,56x41,34 in.



HIGH STOOL
400x400x580-780 mm.
15,75x15,75,39x22,83-30,71 in.

BUBLIING M | OPTIONAL FEATURES



CASTERS
High load capacity.
Adjustment is made from the inside.



AIR SPRING
Metal hydraulic system for the door.




SOFA CUSHION
Covered with 100% polyester fabric.
12 colors available.



INTERNAL MONITOR SUPPORT
Monitor not included.
Size: 13-42 inches.



BUBLIING FRESH AIR
Non-adjustable system.
Noise-free.

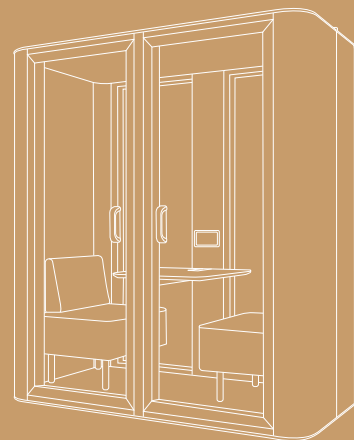


MODELO BUBLIING M
TECHINICAL SPECIFICATIONS



BUBLIING M | TECHNICAL SPECIFICATIONS

GENERAL DESCRIPTION


Dimensions	Exterior: 2006x1006x2245 mm / 78,98x39,61x88,39 in. With castors: + 52 mm / 2,05 in. With Bubliing Fresh Air: + 50 mm / 1,97 in Interior: 1708x974x2060 mm / 67,24x38,35x81,10 in Entry Height: 86 mm / 3,39 in ; With castors: 138 mm / 5,43 in Door: 2108x774 mm / 82,99x30,47 in
Standard weight	510 kg / 1124 lb.
Acoustics	Class A dB,A >30 dB Guaranteed speech level reduction according to ISO 23351-1 testing method, with one of the highest ratings in the industry.
Sound output	Airflow: 560,8 m³/h (2 fans). Air is renewed, on average, every 5.6 minutes. Airflow can be manually adjusted. In standby mode, the system activates for 10 minutes per hour.
Lighting	Ceiling Light: LED lighting with a color temperature of 3500K–4000K, providing up to 500 lux on the desk. Lighting is automatic and can be manually adjusted.
Occupancy indicators	LED sensor technology with exterior red or green light.
Digital control	7" touchscreen digital control panel.
Mobility	High-resistance leveling feet adjustable from inside the booth. BUBLIING is prepared for the installation of castors (optional). The leveling feet must be raised to move the booth and lowered once it is in the desired position.

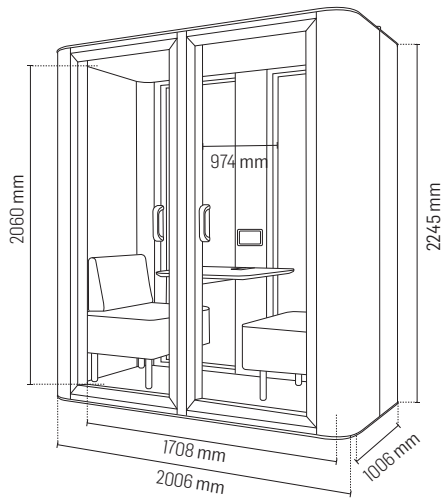


MATERIALS

Exterior	Exterior panels: Made of powder-coated steel, available in 10 interchangeable colors. Frame and door: Made of matte black lacquered aluminum (RAL 9005) with concealed pivot hinge. Handle: Made of textured black polymer. Glass: 8 mm / 0.31 in clear acoustic glass.
Interior	Structure: Metal frame, wood, and recycled acoustic foam. Covering: 100% polyester fabric available in 12 colors. Flooring: 100% polyamide carpet available in 4 colors. Table: Birch plywood top with white, black fingerprint-resistant thermolaminate, or wood imitation finish. Metal support structure.
Standard furniture	Table Dimensions: 745x700x730 mm / 29,33x27,56x28,74 in. Table Height: 730 ou 1050 mm / 28,74 ou 41,34 in. Maximum load for the table is 90 kg / 198,42 lbs. Sofa Dimensions: 730x570x450 mm / 28,74x22,44x17,72 in. Sofa upholstered in 100% polyester fabric, available in 12 colors. Clothes hangers (2): lacquered in textured black RAL 9005.
Furniture options	High stools: 400x400x 580-780 mm / 15,75x15,75x22,83-30,71 in. This optional piece is upholstered in 100% polyester fabric, available in 12 colors. Maximum load for the sea is 135 kg / 297.12 lbs.

With sofa:

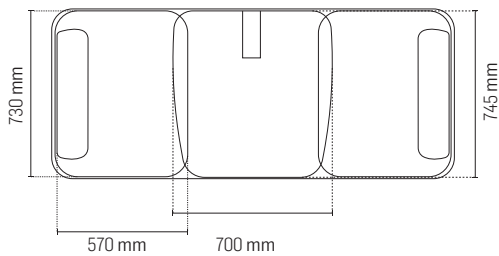

With high stools:

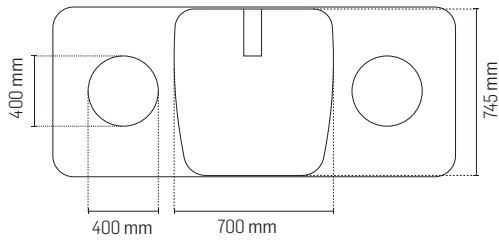

BUBLIING M | TECHNICAL SPECIFICATIONS

SAFETY

Fire protection	All coating materials, upholstery, and acoustic materials used in our products are tested and classified according to national or international standards. Fabrics: EN 13501-1 Adhered Class B, s1, d0. Foams: ISO 3795. Carpet: EN 13501-1 CfI – s1. Wood: EN 13986, Class D-s2, d0.
Seismic protection	The BUBLIING can be supplied with a system that allows attachment to the floor, available for seismic regions.

ENERGY


Charger output	2x Schuko sockets - 230 V. 1x USB-C port. 1x USB-A port. Optional: RJ45 Network socket; HDMI input.
Equipment power	60 W.
Standby consumption	0,74 W.
Standard consumption	AC output (electrical socket); 100-240 VAC, 16 A, 50-60 Hz.
Electrical equipment	65 W USB-C output.

EXTRA FEATURES

Options	Metal hydraulic air spring for door closer. High load capacity castors. Castors and leveling feet are adjustable from inside the BUBLIING. Sofa cushion upholstered in 100% polyester fabric, available in 12 colours. Bubliing Fresh Air system , non-adjustable and noise-free. Metal interior monitor stand with VESA mounting. Monitor not included. Maximum monitor size is 13-42 inches.
---------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

SPACE AND INSTALLATION

Required Space	BUBLIING depth 1006 mm / 39.61 in + 100° door opening. Minimum recommended clearance for air circulation above and on the sides 150 mm / 5.91 in.
Installation Space	Installation requires 500 mm / 19.69 in of free space around the BUBLIING.
Assembly	Assembly time: 1 hour. Number of people: 2 people.

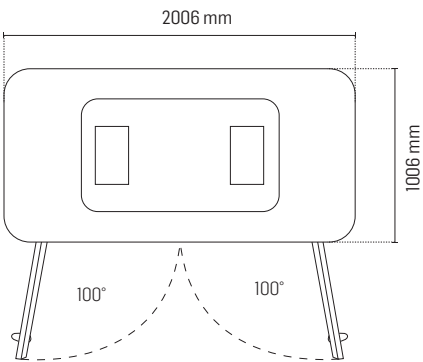




A SPACE FOR FOUR PEOPLE

It stands out for its versatility. It offers a quiet space to meet in small groups, with functional furniture and support materials for presentations or strategic planning.

EXT 2356x1456x2245 mm	INT 2058x1426x2114 mm
EXT 92,91x57,32x88,43 in	INT 81,02x56,06x83,27 in

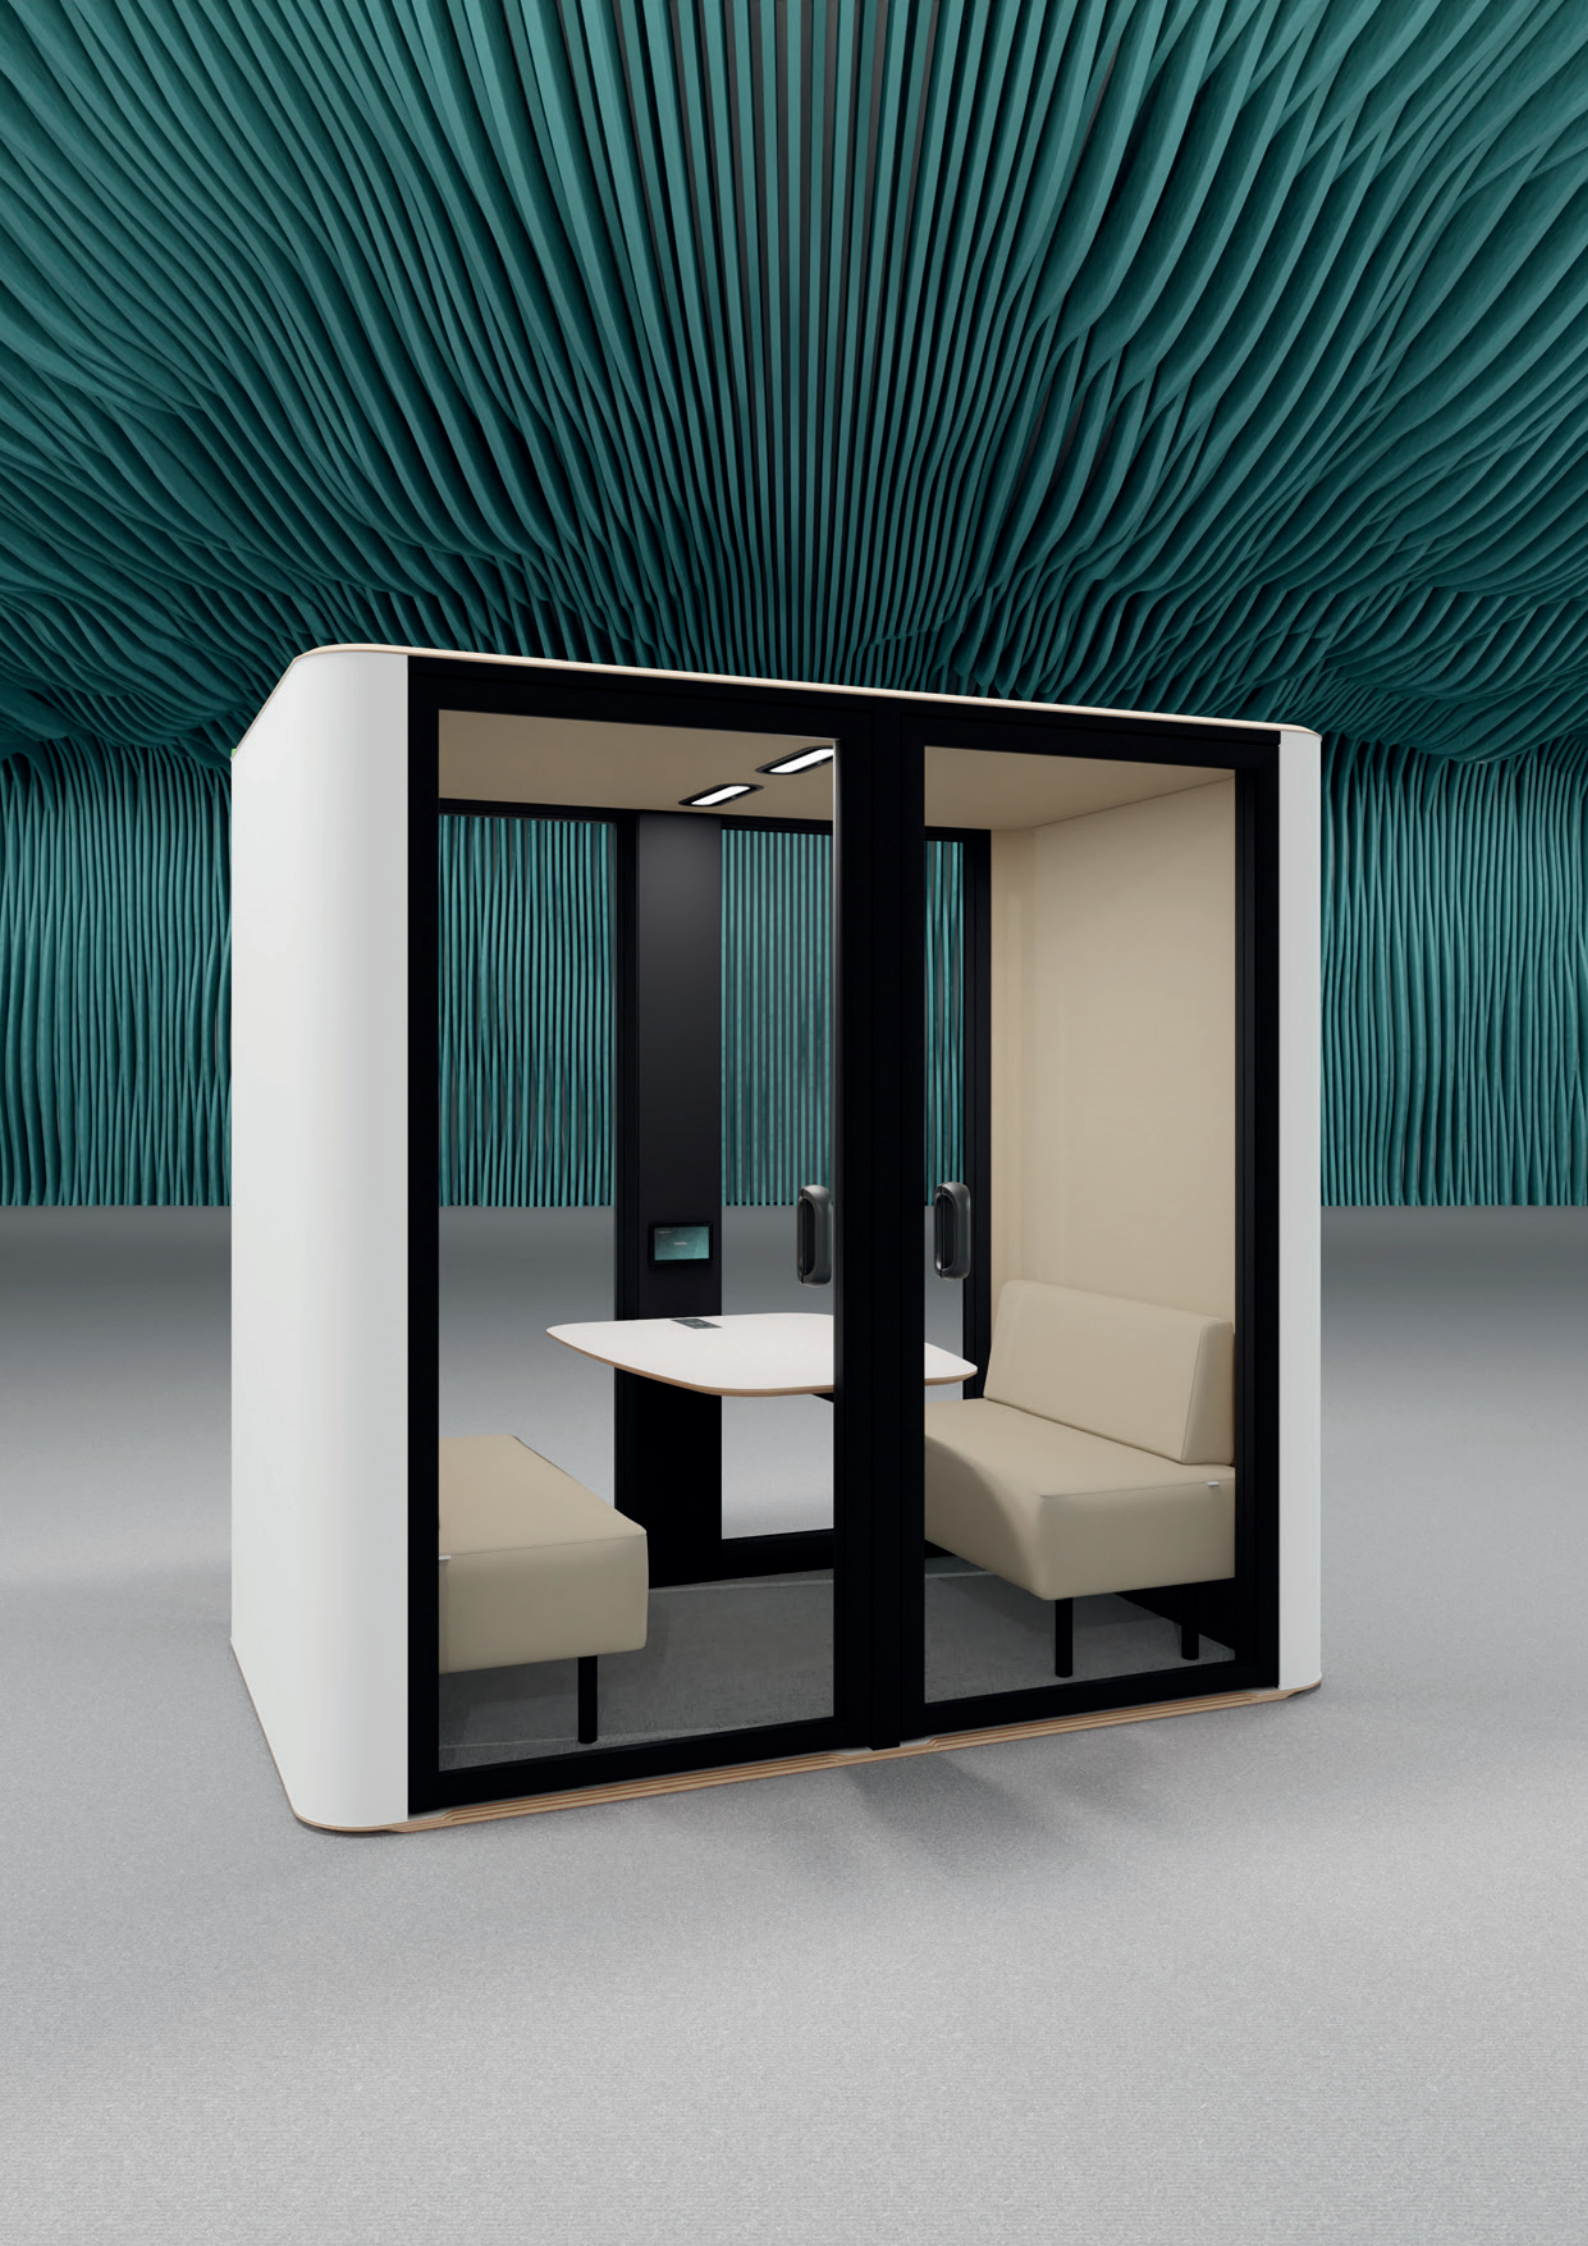

MODEL | BUBLIING L

ALL THE ANSWERS IN ONE PLACE.



GUARANTEED PRIVACY

Structure with a workspace that offers acoustic insulation >30dB Class A. This ensures that external noise won't disturb you, and due to its internal acoustics, it provides a private and comfortable space.



ENHANCED VENTILATION

Ventilation system with adjustable airflow that can be quickly and intuitively controlled according to your needs. In standby mode, the fans operate for 10 minutes per hour to ensure the air is always refreshed.



INCLUSIVE BUBLIING

This model offers the option of the PMR set, which includes a retractable table and sofas, access ramp, support bars inside the doors, and protective plates for the doors, providing greater accessibility and comfort for people with reduced mobility.



AUTOMATIC LIGHTING

LED lighting that can also be easily and quickly adjusted between 3500K-4000K according to your needs. BUBLIING detects when it is occupied and automatically notifies with an occupancy indicator, green or red.



UNLIMITED CONNECTIVITY

It offers 2 standard SCHUKO outlets, 1 USB-C port, and 1 USB-A port, ensuring you are always connected, whether for charging your devices or using electronic appliances with ease.

BUBLIING L | STANDARD FURNITURE



LOW TABLE
1195x830x730 mm.
47,05x32,68x28,74 in.



SOFAS
1173x570x450 mm.
46,18x22,44x17,72 in.



CLOTHES HANGERS
2 units.

BUBLIING L | STANDARD FEATURES



CONNECTIVITY
2x Schuko sockets - 230 V.
1x USB-C port.
1x USB-A port.




CONTROL SCREEN
7-inch digital control.



OCCUPANCY INDICATOR
Exterior LED sensor technology.
2 units.

BUBLIING L | OPTIONAL FURNITURE



HIGH TABLE
1195x830x1050 mm.
47,05x32,68x41,34 in.

BUBLIING L | OPTIONAL FEATURES



AIR SPRING
Metal hydraulic system for the door.



BUBLIING FRESH AIR
Non-adjustable system.
Noise-free.



SOFA CUSHION
Covered with 100% polyester fabric.
12 colors available.




INTERNAL MONITOR SUPPORT
Monitor not included.
Size: 13-42 inches.



EXTERNAL MONITOR SUPPORT
Monitor not included.
Size: 37-70 inches.



EXTERNAL WHITE BOARD
1040x910 mm.
40,94x35,83 in.

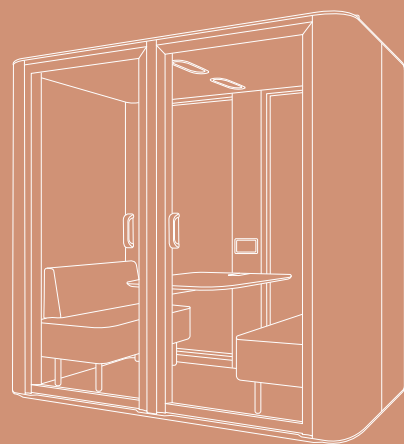


MODELO BUBLINO L
TECHINICAL SPECIFICATIONS



BUBLIING L | TECHNICAL SPECIFICATIONS



GENERAL DESCRIPTION

Dimensions	Exterior: 2356x1456x2245 mm / 92,76x57,32x88,39 in. With Bubliing Fresh Air: +50 mm / 1,97 in. Interior: 2058x1426x2114 mm / 81,09x56,14x83,23 in. Entry Height: 23 mm / 0,91 in. Door: 2134x949 mm / 83,90x37,36 in.
Standard weight	740 kg / 1632 lb.
Acoustics	Class A dB,A >30 dB. Guaranteed speech level reduction according to ISO 23351-1 testing method, with one of the highest ratings in the industry.
Fan flow rate	Airflow: 1121,6 m³/h (8 fans). Air is renewed, on average, every 5.6 minutes. Airflow can be manually adjusted. In standby mode, the system activates for 10 minutes per hour.
Lighting	Ceiling Light: LED lighting with a color temperature of 3500K–4000K, providing up to 500 lux on the desk. Lighting is automatic and can be manually adjusted.
Occupancy indicators	LED sensor technology with exterior red or green light.
Digital control	7" touchscreen digital control panel.
Mobility	High-resistance leveling feet adjustable from inside the booth. BUBLIING is designed to accommodate people with reduced mobility and wheelchair users. Ramp with an entry height of 23 mm / 0.91 in.

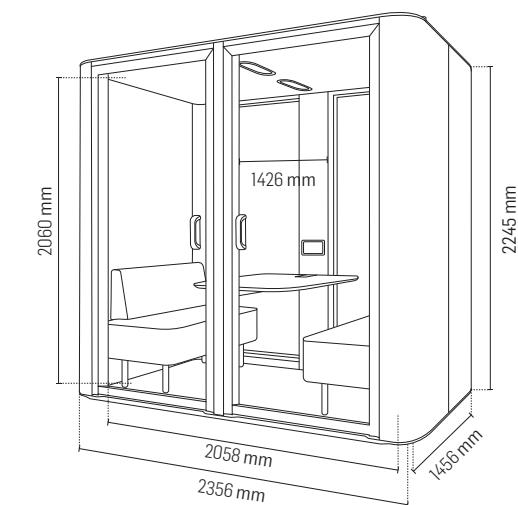

MATERIALS

Exterior	Exterior panels: Made of powder-coated steel, available in 10 interchangeable colors. Frame and door: Made of matte black lacquered aluminum (RAL 9005) with concealed pivot hinge. Handle: Made of textured black polymer. Glass: 8 mm / 0.31 in clear acoustic glass.
Interior	Structure: Metal frame, wood, and recycled acoustic foam. Covering: 100% polyester fabric available in 12 colors. Flooring: 100% polyamide carpet available in 4 colors. Table: Birch plywood top with white, black fingerprint-resistant thermolaminate, or wood imitation finish. Metal support structure.
Standard furniture	Table Dimensions: 1195x830x730 mm / 47,05x32,68x28,74 in. Table Height: 730 ou 1050 mm / 28,74 ou 41,34 in. Maximum load for the table is 120 kg / 264,55 lbs. Sofa Dimensions: 1173x570x450 mm / 46,18x22,44x17,72 in. Sofa upholstered in 100% polyester fabric, available in 12 colors. Maximum load for the sea is 250 kg / 551,16 lbs. Clothes hangers (2): lacquered in textured black RAL 9005.
PRM kit	This model is designed to meet the needs of people with reduced mobility (PRM). Please refer to the PRM kit technical sheet for additional details.

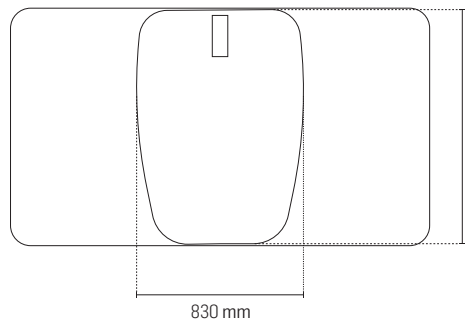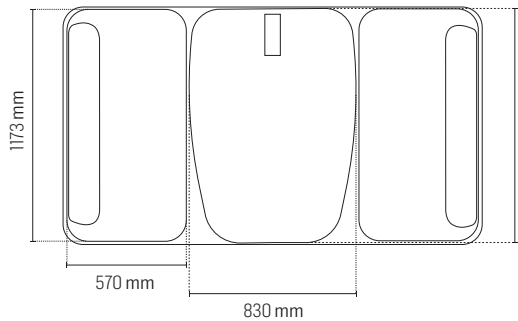

BUBLIING L | TECHNICAL SPECIFICATIONS

SAFETY

Fire protection	All coating materials, upholstery, and acoustic materials used in our products are tested and classified according to national or international standards. Fabrics: EN 13501-1 Adhered Class B, s1, d0. Foams: ISO 3795. Carpet: EN 13501-1 Cfl – s1. Wood: EN 13986, Class D-s2, d0.
Seismic protection	The BUBLIING can be supplied with a system that allows attachment to the floor, available for seismic regions.

ENERGY


Charger output	2x Schuko sockets - 230 V. 1x USB-C port. 1x USB-A port. Optional: RJ45 Network socket; HDMI input.
Equipment power	93 W.
Standby consumption	0,74 W.
Standard consumption	AC output (electrical socket); 100-240 VAC, 16 A, 50-60 Hz.
Electrical equipment	65 W USB-C output.

EXTRA FEATURES

Options	Metal hydraulic air spring for door closer. Bubliing Fresh Air system, non-adjustable and noise-free. Sofa cushion upholstered in 100% polyester fabric, available in 12 colours. Metal interior monitor stand with VESA mounting. Monitor not included. Maximum monitor size is 13-42 inches. Metal exterior monitor stand with VESA mounting. Monitor not included. Maximum monitor size is 37-70 inches. Outdoor whiteboard 1040x910 mm / 40.94x35.83 in.
---------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

SPACE AND INSTALLATION

Required Space	BUBLIING depth 1456 mm / 57.32 in + Door opening of 100°. Minimum recommended airflow space above and on the sides: 150 mm / 5.91 in.
Installation Space	Installation requires 500 mm / 19.69 in of free space around the BUBLIING.
Assembly	Assembly time: 2 hours. Number of people: 3 people.

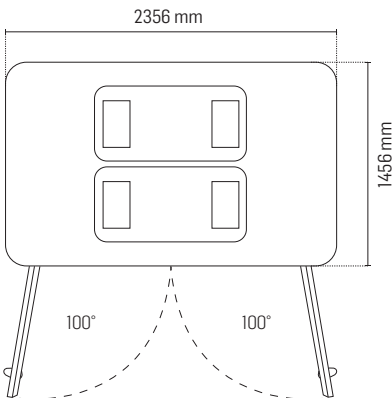

XL



A SPACE FOR SIX PEOPLE

This model takes versatility to another level. It creates a serene environment for larger team meetings, offering functional equipment for presentations or strategic planning sessions.

EXT 2356x2006x2245 mm	INT 2085x1976x2114 mm
EXT 92,91x78,94x88,43 in	INT 88,09x77,87x83,27 in

MODEL | BUBLIING XL

EXPAND THE POSSIBILITIES ELEVATE THE EXPECTATIONS.



GUARANTEED PRIVACY

Structure with a workspace that offers acoustic insulation >30dB Class A.
This ensures that external noise won't disturb you, and due to its internal acoustics, it provides a private and comfortable space.



ENHANCED VENTILATION

Ventilation system with adjustable airflow that can be quickly and intuitively controlled according to your needs. In standby mode, the fans operate for 10 minutes per hour to ensure the air is always refreshed.



INCLUSIVE BUBLIING

This model offers the option of the PMR set, which includes a retractable table and sofas, access ramp, support bars inside the doors, and protective plates for the doors, providing greater accessibility and comfort for people with reduced mobility.



AUTOMATIC LIGHTING

LED lighting that can also be easily and quickly adjusted between 3500K-4000K according to your needs. BUBLIING detects when it is occupied and automatically notifies with an occupancy indicator, green or red.



UNLIMITED CONNECTIVITY

It offers 3 standard SCHUKO outlets, 1 USB-C port, 1 USB-A port, and 1 RJ45 port, ensuring you are always connected, whether for charging your devices or using electronic appliances with ease.

BUBLIING XL | STANDARD FURNITURE



LOW TABLE
1745x870x730 mm.
68,70x34,25x28,74 in.



SOFA
1720x570x450 mm.
67,72x22,44x17,72 in.



CLOTHES HANGERS
2 units.

BUBLIING XL | STANDARD FEATURES



CONNECTIVITY
3x standard Schuko sockets - 230 V.
1x USB-C port.
1x USB-A port.
1x RJ45 network socket.



CONTROL SCREEN
7-inch digital control.



OCCUPANCY INDICATOR
Exterior LED sensor technology.
2 units.

BUBLIING XL | OPTIONAL FURNITURE



HIGH TABLE
1745x870x1050 mm.
68,70x34,25x41,34 in.

BUBLIING XL | OPTIONAL FEATURES



AIR SPRING
Metal hydraulic system for the door.



BUBLIING FRESH AIR
Non-adjustable system.
Noise-free.



SOFA CUSHION
Covered with 100% polyester fabric.
12 colors available.




INTERNAL MONITOR SUPPORT
Monitor not included.
Size: 13-42 inches.



EXTERNAL MONITOR SUPPORT
Monitor not included.
Size: 37-70 inches.



EXTERNAL WHITE BOARD
1040x910 mm.
40,94x35,83 in.

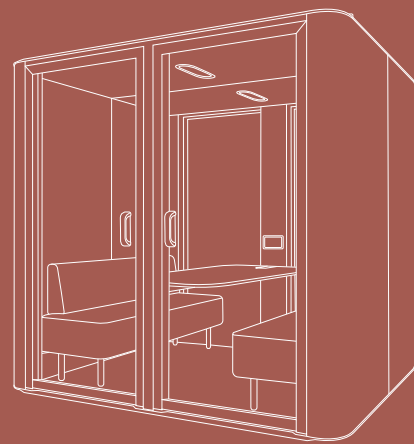


MODELO BUBLINO XL
TECHINICAL SPECIFICATIONS



BUBLIING XL | TECHNICAL SPECIFICATIONS



GENERAL DESCRIPTION

Dimensions	Exterior: 2356x2006x2245 mm / 92,76x78,98x88,39 in. With Bubliing Fresh Air: + 50 mm / 1,97 in Interior: 2085x1976x2114 mm / 82,09x77,80x83,23 in. Entry Height: 23 mm / 0,91 in. Door: 2134x949 mm / 83,90x37,36 in.
Standard weight	930 kg / 2059 lb.
Acoustics	Class A dB,A >30 dB. Guaranteed speech level reduction according to ISO 23351-1 testing method, with one of the highest ratings in the industry.
Fan flow rate	Airflow: 1121,6 m³/h (8 fans). Air is renewed, on average, every 5.6 minutes. Airflow can be manually adjusted. In standby mode, the system activates for 10 minutes per hour.
Lighting	Ceiling Light: LED lighting with a color temperature of 3500K–4000K, providing up to 500 lux on the desk. Lighting is automatic and can be manually adjusted.
Occupancy indicators	LED sensor technology with exterior red or green light.
Digital control	7" touchscreen digital control panel.
Mobility	High-resistance leveling feet adjustable from inside the booth. BUBLIING is designed to accommodate people with reduced mobility and wheelchair users. Ramp with an entry height of 23 mm / 0.91 in.

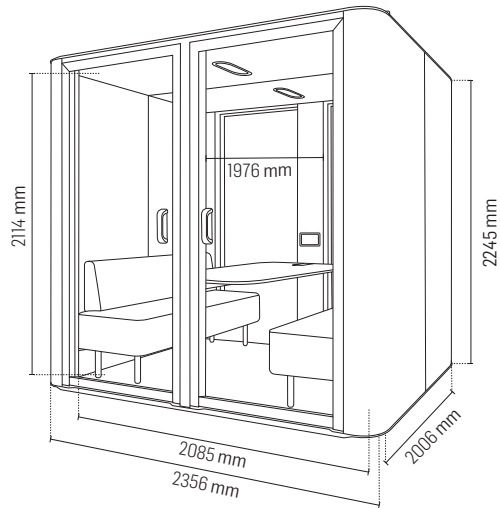

MATERIALS

Exterior	Exterior panels: Made of powder-coated steel, available in 10 interchangeable colors. Frame and door: Made of matte black lacquered aluminum (RAL 9005) with concealed pivot hinge. Handle: Made of textured black polymer. Glass: 8 mm / 0.31 in clear acoustic glass.
Interior	Structure: Metal frame, wood, and recycled acoustic foam. Covering: 100% polyester fabric available in 12 colors. Flooring: 100% polyamide carpet available in 4 colors. Table: Birch plywood top with white, black fingerprint-resistant thermolaminate, or wood imitation finish. Metal support structure.
Standard furniture	Table dimensions: 1745x870x730 mm / 68,70x34,25x28,74 in. Table Height: 730 ou 1050 mm / 28,74 ou 41,34 in. Maximum load for the table is 150 kg / 330,69 lbs. Sofa dimensions: 1720x570x450 mm / 67,72x22,44x17,72 in. Sofa upholstered in 100% polyester fabric, available in 12 colors. Maximum load for the sea is 375 kg / 826,73 lbs. Clothes hangers (2): lacquered in textured black RAL 9005.
PRM kit	This model is designed to meet the needs of people with reduced mobility (PRM). Please refer to the PRM kit technical sheet for additional details.

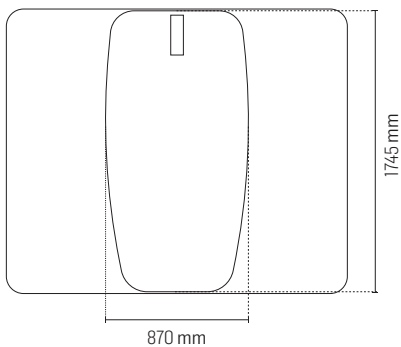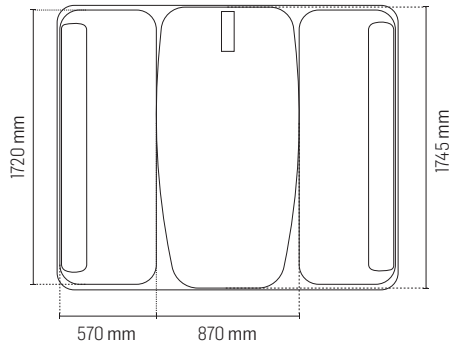

BUBLIING XL | TECHNICAL SPECIFICATIONS

SAFETY

Fire protection	All coating materials, upholstery, and acoustic materials used in our products are tested and classified according to national or international standards. Fabrics: EN 13501-1 Adhered Class B, s1, d0. Foams: ISO 3795. Carpet: EN 13501-1 CfI – s1. Wood: EN 13986, Class D-s2, d0.
Seismic protection	The BUBLIING can be supplied with a system that allows attachment to the floor, available for seismic regions.

ENERGY


Charger output	3x Schuko sockets - 230 V. 1x USB-C port. 1x USB-A port. 1x RJ45 Network socket. Optional: HDMI input.
Equipment power	118 W.
Standby consumption	0,74 W.
Standard consumption	AC output (electrical socket); 100-240 VAC, 16 A, 50-60 Hz.
Electrical equipment	65 W USB-C output.

EXTRA FEATURES

Options	Metal hydraulic air spring for door closer. Bubliing Fresh Air system, non-adjustable and noise-free. Sofa cushion upholstered in 100% polyester fabric, available in 12 colours. Metal interior monitor stand with VESA mounting. Monitor not included. Maximum monitor size is 13-42 inches. Metal exterior monitor stand with VESA mounting. Monitor not included. Maximum monitor size is 37-70 inches. Outdoor whiteboard 1594x910 mm / 62,76x35,83 in.
---------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

SPACE AND INSTALLATION

Required Space	BUBLIING depth 2006 mm / 78.98 in + Door opening of 100°. Minimum recommended airflow space above and on the sides: 150 mm / 5.91 in.
Installation Space	Installation requires 500 mm / 19.69 in of free space around the BUBLIING.
Assembly	Assembly time: 2 hours. Number of people: 3 people.

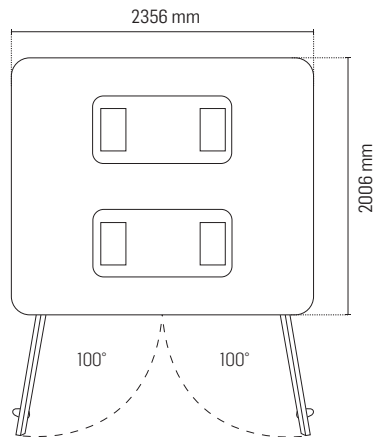

R



A SPACE FOR EIGHT PEOPLE

Being the largest of all models, this BUBLIING redefines the limits of flexibility and mobility. Its innovation provides freedom of movement, offering a space that adapts to various layouts.

EXT 3000x3000x2245 mm	INT 2708x2976x2114 mm
EXT 118,46x118,46x88,43 in	INT 88,09x77,87x83,27 in



MODEL | BUBLIING R

WITH EVERY STEP, A SPACE WITHOUT LIMITS.



GUARANTEED PRIVACY

Structure with a workspace that offers acoustic insulation >30dB Class A. This ensures that external noise won't disturb you, and due to its internal acoustics, it provides a private and comfortable space.



ENHANCED VENTILATION

Ventilation system with adjustable airflow that can be quickly and intuitively controlled according to your needs. In standby mode, the fans operate for 10 minutes per hour to ensure the air is always refreshed.



INCLUSIVE BUBLIING

This model offers the PMR set option, which includes an access ramp, support bars inside the doors, and protective plates for the doors, providing greater accessibility and comfort for people with reduced mobility.



AUTOMATIC LIGHTING

LED lighting that can also be easily and quickly adjusted between 3500K-4000K according to your needs. BUBLIING detects when it is occupied and automatically notifies with an occupancy indicator, green or red.



UNLIMITED CONNECTIVITY

It offers 4 standard SCHUKO outlets, 1 USB-C port, 1 USB-A port, and 1 RJ45 port, ensuring you are always connected, whether for charging your devices or using electronic appliances with ease.

BUBLIING R | STANDARD FURNITURE



LOW TABLE FOR 6 PEOPLE
1800x1000x730 mm.
70,87x39,37x28,74 in.



CLOTHES HANGERS
4 units.



HIGH TABLE FOR 8 PEOPLE
1800x1000x1050 mm.
70,87x39,37x41,344 in.



CLOTHES HANGERS
4 units.

BUBLIING R | OPTIONAL FURNITURE



LOW TABLE FOR 6 PEOPLE
1400x1000x730 mm.
55,12x39,37x28,74 in.



CLOTHES HANGERS
4 units.



HIGH TABLE FOR 6 PEOPLE
1400x1000x1050 mm.
55,12x39,37x41,34 in.



CLOTHES HANGERS
4 units.

BUBLIING R | STANDARD FEATURES



CONNECTIVITY
4x standard Schuko sockets - 230 V.
1x USB-C port.
1x USB-A port.
1x RJ45 network socket.




CONTROL SCREEN
7-inch digital control.



OCCUPANCY INDICATOR
Exterior LED sensor technology.
2 units.

BUBLIING R | OPTIONAL FEATURES

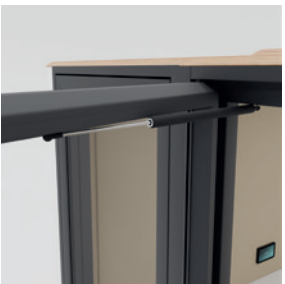

AIR SPRING
Metal hydraulic system for the door.



INTERNAL MONITOR SUPPORT
Monitor not included.
Size: 13-42 inches.




EXTERNAL MONITOR SUPPORT
Monitor not included.
Size: 37-70 inches.



INTERNAL WHITE BOARD
1595x910 mm.
62,80x35,83 in.



EXTERNAL WHITE BOARD
2000x910 mm.
78,74x35,83 in.

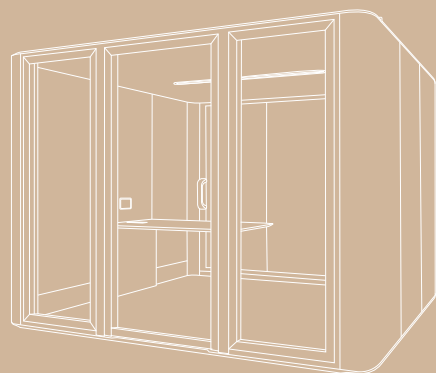


MODELO BUBLIING R
TECHINICAL SPECIFICATIONS



BUBLIING R | TECHNICAL SPECIFICATIONS

GENERAL DESCRIPTION

Dimensions	Exterior: 3000x3000x2245 mm / 118,11x118,11x88,39 in. Interior: 2708x2976x2114 mm / 106,61x117,17x83,23 in. Entry Height: 23 mm / 0,91 in. Door: 2134x949 mm / 83,90x37,36 in.
Standard weight	1120 kg / 2467 lb.
Acoustics	Class A dB,A >30 dB. Guaranteed speech level reduction according to ISO 23351-1 testing method, with one of the highest ratings in the industry.
Fan flow rate	Airflow: 1402 m³/h (10 fans). Air is renewed, on average, every 5.6 minutes. Airflow can be manually adjusted. In standby mode, the system activates for 10 minutes per hour.
Lighting	Ceiling Light: LED lighting with a color temperature of 3500K–4000K, providing up to 500 lux on the desk. Lighting is automatic and can be manually adjusted.
Occupancy indicators	LED sensor technology with exterior red or green light.
Digital control	7" touchscreen digital control panel.
Mobility	High-resistance leveling feet adjustable from inside the booth. BUBLIING is designed to accommodate people with reduced mobility and wheelchair users. Ramp with an entry height of 23 mm / 0.91 in.

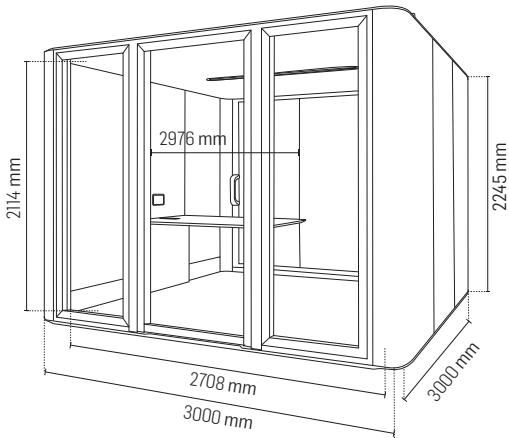

MATERIALS

Exterior	Exterior panels: Made of powder-coated steel, available in 10 interchangeable colors. Frame and door: Made of matte black lacquered aluminum (RAL 9005) with concealed pivot hinge. Handle: Made of textured black polymer. Glass: 8 mm / 0.31 in clear acoustic glass.
Interior	Structure: Metal frame, wood, and recycled acoustic foam. Covering: 100% polyester fabric available in 12 colors. Flooring: 100% polyamide carpet available in 4 colors. Table: Birch plywood top with white, black fingerprint-resistant thermolaminate, or wood imitation finish. Metal support structure.
Standard furniture	Table dimensions (8 people): 1800x1000x730 mm / 70,87x39,37x28,74 in. Table Height: 730 ou 1050 mm / 28,74 ou 41,34 in. Maximum load for the table is 150 kg / 330,69 lbs. Clothes hangers (4): lacquered in textured black RAL 9005. Table dimensions (6 people): 1400x1000x730 mm / 55,12x39,37x28,74 in. Table Height: 730 ou 1050 mm / 28,74 ou 41,34 in. Maximum load for the table is 150 kg / 330,69 lbs. Clothes hangers (4): lacquered in textured black RAL 9005.
PRM kit	This model is designed to meet the needs of people with reduced mobility (PRM). Please refer to the PRM kit technical sheet for additional details.

Table for 8 people:





Table for 6 people:



BUBLIING R | TECHNICAL SPECIFICATIONS

SAFETY

Fire protection	All coating materials, upholstery, and acoustic materials used in our products are tested and classified according to national or international standards. Fabrics: EN 13501-1 Adhered Class B, s1, d0. Foams: ISO 3795. Carpet: EN 13501-1 CfL – s1. Wood: EN 13986, Class D-s2, d0.
Seismic protection	The BUBLIING can be supplied with a system that allows attachment to the floor, available for seismic regions.

ENERGY


Charger output	4x Schuko sockets - 230V. 1x USB-C port. 1x USB-A port. 1x RJ45 network socket. Optional: HDMI port.
Equipment power	176 W.
Standby consumption	0,98 W.
Standard consumption	AC output (electrical socket); 100-240 VAC, 16 A, 50-60 Hz.
Electrical equipment	65 W USB-C output.

EXTRA FEATURES

Options	Metal hydraulic air spring for door closer. Metal interior monitor stand with VESA mounting. Monitor not included. Maximum monitor size is 13-42 inches. Metal exterior monitor stand with VESA mounting. Monitor not included. Maximum monitor size is 37-70 inches. Indoor whiteboard 1595x910 mm / 62,80x35,83 in Outdoor whiteboard 2000x910 mm / 78,74x35,83 in
---------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

SPACE AND INSTALLATION

Space and Installation	BUBLIING depth 3000 mm / 118,11 in + Door opening of 100°. Minimum recommended airflow space above and on the sides: 150 mm / 5,91 in.
Required Space	Installation requires 500 mm / 19.69 in of free space around the BUBLIING.
Assembly	Assembly time: 4 hours. Number of people: 3 people.

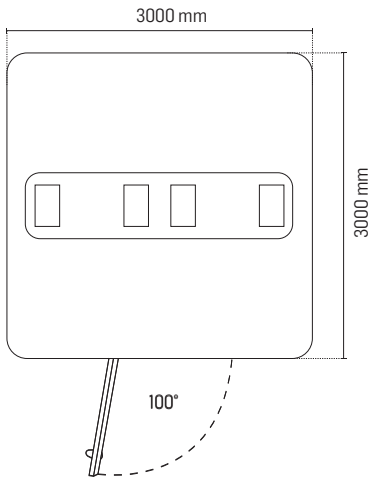

FOR PEOPLE WITH REDUCED MOBILITY

INCLUSIVE BUBLIING

The L, XL, and R models have been designed to be fully compatible with a wide range of accessories adapted for People with Reduced Mobility (PRM). This ensures that all users can enjoy an inclusive, safe, and comfortable environment, with solutions that meet specific mobility needs. These models ensure greater autonomy and accessibility, providing a functional and welcoming space for everyone.



RETRACTABLE SOFA

Adapted table with a retractable mechanism that allows the table to be easily folded and stored for the entry of people with reduced mobility.



RETRACTABLE TABLE

This system allows the sofa to be easily stored when not in use, ensuring greater flexibility in the space.



ACCESS RAMP

The entry height for the BUBLIING is 23 mm / 0.91 in, ensuring easy access for all users. The door has an opening of 100°.



SUPPORT BARS

Installed inside the BUBLIING at a height of 850 mm / 33.46 in to help users open and close the door more easily, providing ergonomic and secure support.



PROTECTION PLATES

Located inside and outside the BUBLIING, they were designed to reinforce the safety and durability of the door glass, protecting against accidental impacts from wheelchairs.



All additional PMR options - Support Bars, Retractable Table, and Retractable Sofa - must be purchased together. Although the Access Ramp has been designed to facilitate the entry of people with reduced mobility, it is a standard feature of the L, XL, and R models.



A SPACE FOR EVERYONE

WE WANT TO ENSURE
YOUR COMFORT AND SUCESS,
WITH ALL THE RESOURCES.

THE FINAL TOUCH TO HELP YOU
DO MORE AND BETTER.

COLORS AND FINISHES

INTERIOR FINISH

- Beige
CSE01
- Light Gray
CSE41
- Charcoal Gray
CSE13
- Brown Beige
CSE02
- Tea Green
CSE33
- Olive Green
CSE34
- Light Blue
CSE38
- Navy Blue
CSE40
- Coral Red
CSE24
- Classic Red
CSE29
- Yellow
CSE03
- Mustard
CSE31

EXTERIOR COATING

- White
RAL 9003 MATE
- Light Gray
RAL 9002 MATE
- Dark Gray
RAL 7039 MATE
- Black
RAL 9005 MATE
- Dark Green
RAL 6028 MATE
- Light Green
RAL 6021 MATE
- Dark Blue
RAL 5001 MATE
- Light Blue
RAL 5014 MATE
- Red Beige
RAL 3012 MATE
- Beige
RAL 1001 MATE

INTERIOR FLOORING

- Beige
393100
- Ligh Gray
393300
- Dark gray
393350
- Brown
327260

TABLETOP

- Plywood with
white laminated
- Plywood with
anti-fingerprint
black laminated
- Plywood with
oak laminated

Projeta a tua BUBLING
no nosso website.
www.bubling.com



GUARANTEED PRIVACY

BUBLIING's are designed to create a quiet environment that enhances concentration and privacy.

Prioritizing natural acoustic comfort, the goal is not to achieve absolute silence but to reduce the impact of external noise, creating a balanced environment where privacy, comfort, and functionality coexist harmoniously.

With superior acoustic capabilities, we ensure that external noise doesn't disturb you and that your conversations aren't overheard outside the BUBLIING, providing a productive and focused workspace comparable to or even exceeding the comfort of remote work.

This balance offers users greater focus and productivity, without completely disconnecting them from their surroundings.

productivity, without completely disconnecting them from their surroundings.

The design of the BUBLIING uses high-performance acoustic materials. The interior of the booths is made up of sound-absorbing panels that provide a reverberation-free environment, glass, and a structure designed to enhance acoustic insulation, with walls made of high-performance recycled acoustic foam for superior efficiency.

With a sound reduction of over 30dB, we ensure acoustic privacy according to the ISO 23351-1 testing method, one of the best industry ratings - Class A.



AUTOMATIC LIGHTING

The BUBLIING's offer an optimized work environment with advanced lighting features and automated adaptation.

Equipped with linear LED lighting, they can be adjusted in both intensity and color temperature, ranging from 3500K to 4000K, ensuring suitable lighting for different needs and times of the day. The S and Stwin models offer an optional adjustable face light for video calls.

Each BUBLIING is **equipped with two LED presence indicators on the top, one on each side** – Green or Red. This intuitive indicator allows users to quickly know whether the BUBLIING is occupied or available for use, promoting efficient management of shared spaces.



ENHANCED VENTILATION

Integrated technology and a focus on the well-being of your employees are essential for creating work environments that foster collaboration, innovation, and connection.

BUBLIING features an **efficient ventilation system that meets the ventilation requirements for indoor commercial and service spaces**. The system was tested in an accredited laboratory, in accordance with ISO 12569:2017 standards, ensuring both the ventilation quality and the acoustic performance of BUBLIING.

In use mode, the air is renewed, on average, every **5.6 minutes**. After each use, in **standby mode**, BUBLIING automatically activates the fans for **10 minutes** to refresh the surrounding air, ensuring that the environment always has clean and fresh air.



LIMITLESS CONNECTION

The BUBLIING's offer limitless connectivity, designed to facilitate use and integration in various environments. Each model is easily connected to a simple power outlet via a power cable and is ready to use.

Internally, they are **equipped with at least one standard SCHUKO socket and one USB-C port**.

The number of ports may vary from model to model, adjusted according to the occupancy capacity of each model.

Smaller models may have fewer ports, while larger models, such as the XL model, being even more versatile, also include an RJ45 port for Ethernet network connection. Additional input options can be added.



INCLUSIVE BUBLIING

The BUBLIING's were designed with a strong commitment to accessibility and comfort.

The L and XL models do not have a podium and offer the PMR set, which includes: access ramp, retractable table and sofas, support bars, and protection panels.

The R model also offers the access ramp, support bars, and protection panels.

This significantly facilitates the entry of people with reduced mobility, ensuring that all users can enjoy a modern and efficient work environment, regardless of their physical needs.

This commitment to inclusion and well-being makes our BUBLIING's the ideal choice for any workspace, reflecting a universal and welcoming approach.

| BUBLIING OPTIONS



CASTERS
Optional for S / Stwin / M

Designed to support heavy loads, the casters ensure smooth and secure movement, allowing you to easily reposition the BUBLIING without the need for disassembly.



AIR SPRING FOR DOOR
Optional for all models.

This mechanism uses hydraulic force to ensure that the doors remain closed smoothly and controlled, providing security and comfort to the users.



MONITOR SUPPORT
Optional for M / L / XL / R.

Installed on the interior and/or exterior of the BUBLIING, depending on the model, the support is designed to hold monitors of various sizes, ensuring a secure and stable installation.



LIFTING TABLE
Optional for S / Stwin

This height-adjustable system (730-1200 mm) allows users to adjust the desk height according to their needs, promoting a correct and comfortable posture for both sitting and standing work.



BUBLIING FRESH AIR
Optional for all models.

It is a non-adjustable system that includes a heat/cool pump, which provides a reduction of a few degrees in the air temperature as it is channeled through the system's cooling duct.



FACE LIGHT
Optional for S / Stwin

It allows video calls to be made with the highest visual quality, regardless of ambient lighting conditions. This clear and professional lighting system provides a soft and even light.



WRITING BOARD
Optional for L / XL / R

It can be installed on the exterior of the BUBLIING (for models L and XL) with a frame painted in the same color finish as the exterior of the BUBLIING or another color of your choice. Alternatively, for the R model, it can be installed on the interior of the BUBLIING with a black-painted frame.



INVISIBLE CHARGER
Optional for S / Stwin

Invisible and integrated into the desk, it allows the user to charge their phone wirelessly, eliminating the need for cables and providing a tidy and efficient work environment.



**MAXIMIZE YOUR EXPERIENCE WITH BUBLIING.
MAKE THE MOST OF ALL AVAILABLE FEATURES.**

Each option and feature offers superior performance in comfort and efficiency, ensuring a personalized and optimized environment for all your needs. From the details of the finishes to the setup of the space, we want to make sure that your space is not only functional but also a reflection of your personal tastes and requirements.

SUSTAINABLE INNOVATION IN YOUR WORKSPACE.

At BUBLIING, innovation goes beyond technology. It includes the use of sustainable materials in our solutions. From the start, we've been committed to creating products that not only enhance productivity but are also crafted with environmental awareness. Our tools are designed to be durable and efficient, utilizing recyclable materials that minimize waste. By choosing BUBLIING, you're opting for a smarter work environment that adapts to your needs while promoting sustainable practices.



WE TRANSFORM SPACES WITH RESPONSIBILITY IN MIND.



DURABILITY

BUBLIING's are built to last, using high-quality materials that undergo constant rigorous testing. Our robust and easy-to-maintain design ensures that BUBLIING's withstand the test of time, reducing the need for frequent replacements and minimizing waste.



RENEWABLE AND RECYCLED MATERIALS

We prioritize the use of sustainable materials, such as certified wood and recyclable acoustic components. These materials are chosen to preserve natural resources and reduce the ecological footprint, without ever compromising the product's quality.



PRODUÇÃO RESPONSÁVEL

We work with optimized manufacturing processes to minimize waste and reduce emissions. Additionally, we prioritize partnerships with suppliers who adopt good environmental practices and sustainable certifications.



CIRCULARITY

We design our solutions with a focus on reuse and recycling. Whenever possible, we use modular materials and easily replaceable components, extending the product's lifespan and facilitating its repurposing at the end of its use cycle.



ENERGY EFFICIENCY

We implement technologies such as LED lighting and low-energy sensors, which optimize energy use and reduce carbon emissions. This ensures that our BUBLIING's are both efficient and sustainable.




LOGÍSTICA OTIMIZADA

We reduce our carbon footprint by optimizing the transportation and packaging of our products. We use recyclable packaging materials and strategies that minimize the transported volume, making the entire process more efficient and sustainable.







BUBLIING 
CG.07_02

Zona Industrial de Oiã, Lote B 28
Rua do Laranjo
3770-059 Oiã - PORTUGAL

(+351) 234 728 065
bubliing@bubliing.com

www.bubliing.com