

BUBLIING R






TECHINICAL SPECIFICATIONS





**With every step,
a space without limits.**


Being the largest of all the models, this BUBLIING redefines the limits of flexibility and mobility. Its innovation provides freedom of movement, offering a space that adapts to various layouts.

-  A space for 8 people
-  Insonorização Classe A
-  Privacidade e conforto garantido
-  Ventilação e iluminação automática
-  Designed for PMR

BUBLING R | TECHNICAL SPECIFICATIONS

GENERAL DESCRIPTION

Dimensions	<p>Exterior: 3000x3000x2245 mm / 118,11x118,11x88,39 in With Bubliing Fresh Air: Adicionais 50 mm / 1,97 in Interior: 2708x2976x2114 mm / 106,61x117,17x83,23 in Entrance height: 23 mm / 0,91 in The door: 2134x949 mm / 83,90x37,36in</p>
Standard weight	1120 kg / 2467 lb
Acoustic	<p>Class A DB,A >30 dB Guaranteed speech level reduction according to the ISO 23351-1 testing method, with one of the best ratings in the industry.</p>
Fan airflow	<p>Airflow: 1402 m³/h (10 fans) The air is renewed, on average, every 5,6 minutes. The airflow can be manually adjusted. In standby mode, the system activates for 10 minutes per hour.</p>
Lighting	<p>Ceiling light: LED lighting with a temperature of 3500 K - 4000 K, providing up to 500 lux on the desk. The lighting is automatic and can be manually adjusted.</p>
Occupancy indicators	LED sensor technology with red or green light indicator.
Mobility	<p>High-strength levelers adjustable from inside the booth. The BUBLING is designed for people with limited mobility and wheelchairs. Ramp with an entrance of 780 mm / 30.71 in.</p>
Manual control	7-inch manual control screen. Controls lighting (intensity and color), ventilation, among other features.

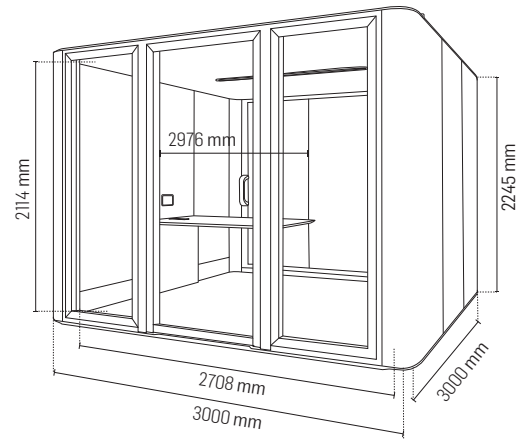

MATERIALS

Exterior	<p>Exterior panels: Made of thermocoated steel, replaceable in 10 available colors. Frame and door: Made of aluminum coated in matte black RAL 9005, with an invisible pivot hinge. Handle: Made of textured black polymer. Glass: Clear acoustic glass, 8 mm / 0.31 in.</p>
Interior	<p>Structure: Metal frame, wood, and recycled acoustic foam. Upholstery: 100% polyester fabric available in 12 colors. Flooring: 100% polyamide carpet available in 4 colors. Table: Top and lower box made of birch plywood covered with white, fingerprint-resistant black laminate, or wood imitation laminate.</p>
Standard furniture	<p>Table dimensions (8 people): 1800x1000x730 mm / 70.87x39.37x28.74 in Table height: 730 or 1050 mm / 28.74 or 41.34 in Maximum load for the table is 50 kg / 110.23 lbs Clothes hangers (4): coated in textured black RAL 9005.</p> <p>Table dimensions (6 people): 1400x1000x730 mm / 55,12x39,37x28,74 in Table height: 730 ou 1050 mm / 28,74 ou 41,34 in Maximum load for the table is 50 kg / 110.23 lbs Clothes hangers (4): coated in textured black RAL 9005.</p>
Options PMR	<p> Support bars (1): located on the door, inside, with a height of 850mm / 33.46 in. Protection plates (2): for the door, inside and outside 840x180mm / 33,07x7,09 in</p>

Table for 8 people:


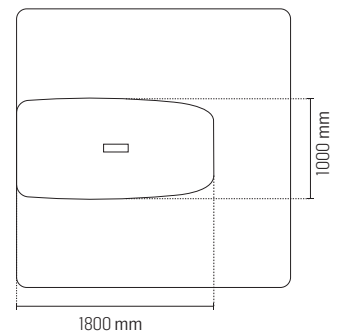


Table for 6 people:

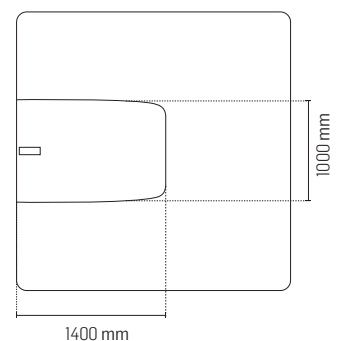

BUBLIING R | TECHNICAL SPECIFICATIONS

SAFETY

Fire protection	All coating materials, upholstery, and acoustic materials used in our products are tested and classified according to national or international standards. Fabrics: EN 13501-1 Adhered Class B, s1, d0 Foams: ISO 3795 Carpet: EN 13501-1 Cfl – s1 Wood: EN 13986, Class D-s2, d0
Earthquake resistance	The BUBLIING can be supplied with a system that allows fixation to the floor, available for seismic regions.

ENERGY


Electrical equipment	4x Schuko sockets - 230 V 1x USB-C port 1x USB-A port 1x RJ45 network socket Optional: HDMI port
Standard consumption	176 W
Standby consumption	0,98 W
Equipment power	AC output (electrical socket); 100-240 VAC, 16 A, 50-60 Hz.
Charger output	USB-C output 18 W

FUNCIONALIDADES EXTRA

Opcionais	Metal hydraulic air spring for door closure. Bubliing Fresh Air , non-adjustable and noise-free system. Metallic interior or exterior monitor support with VESA mount. Monitor not included. Maximum monitor size is 27 inches. White writing board exterior or interior 1040x910 mm / 40.94x35.83 in
------------------	---

SPACE AND INSTALLATION

Required space	BUBLIING depth: 3000 mm / 118,11 in + Door opening of 100°. Minimum recommended space for air circulation above and on the sides: 150 mm / 5.91 in.
Installation space	A instalação requer 500 mm / 19,69 in de espaço livre ao redor da BUBLIING.
Assembly	Assembly time: 4 hours Number of people: 3 people

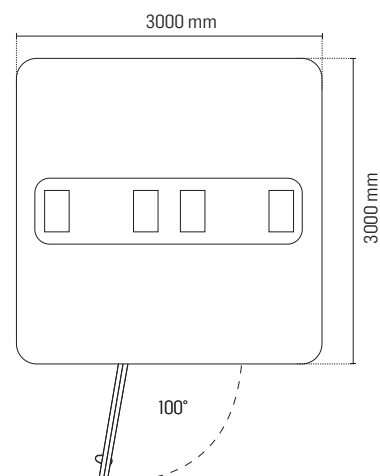

BUBLING R | STANDARD FURNITURE



LOW TABLE FOR 6 PEOPLE
1400x1000x730 mm /
55,12x39,37x28,74 in



CLOTHES HANGERS
4 units



HIGH TABLE FOR 6 PEOPLE
1400x1000x1050 mm /
55,12x39,37x41,34 in



CLOTHES HANGERS
4 units



LOW TABLE FOR 6 PEOPLE
1800x1000x730 mm /
70,87x39,37x28,74 in



CLOTHES HANGERS
4 units



HIGH TABLE FOR 8 PEOPLE
1800x1000x1050 mm /
70,87x39,37x41,344 in



CLOTHES HANGERS
4 units

BUBLIING R | STANDARD FEATURES




CONNECTIVITY

4x tomadas normais Schuko - 230 V
1x entrada USB-C
1x entrada USB-A
1x entrada RJ45



CONTROL SCREEN


7-inch manual control.



OCCUPANCY INDICATOR

Tecnologia a sensore LED per esterni.
2 unità.

BUBLIING R | OPTIONAL FEATURES

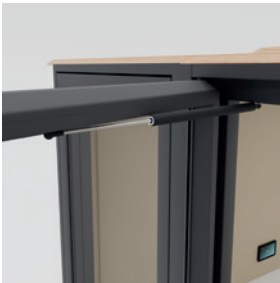

AIR SPRING

Metal hydraulic for door.



BUBLIING FRESH AIR

Non-adjustable system.
Noise-free.



INTERNAL MONITOR SUPPORT

Monitor not included.
Maximum size: 32/42 inches.



EXTERNAL WHITE BOARD

Monitor not included.
Maximum size: 32/42 inches.



EXTERNAL WHITE BOARD

1040x910 mm
40,94x35,83 in



INTERNAL WHITE BOARD

1040x910 mm
40,94x35,83 in

BUBLIING R | OPTIONAL PMR



SUPPORT BARS

1 unit inside the door, at a height
of 850 mm.




PROTECTION PLATES

Inside and outside the door
840x180 mm / 33.07x7.09 in



ACCESS RAMP

The entry height is 23 mm / 0.91 in.

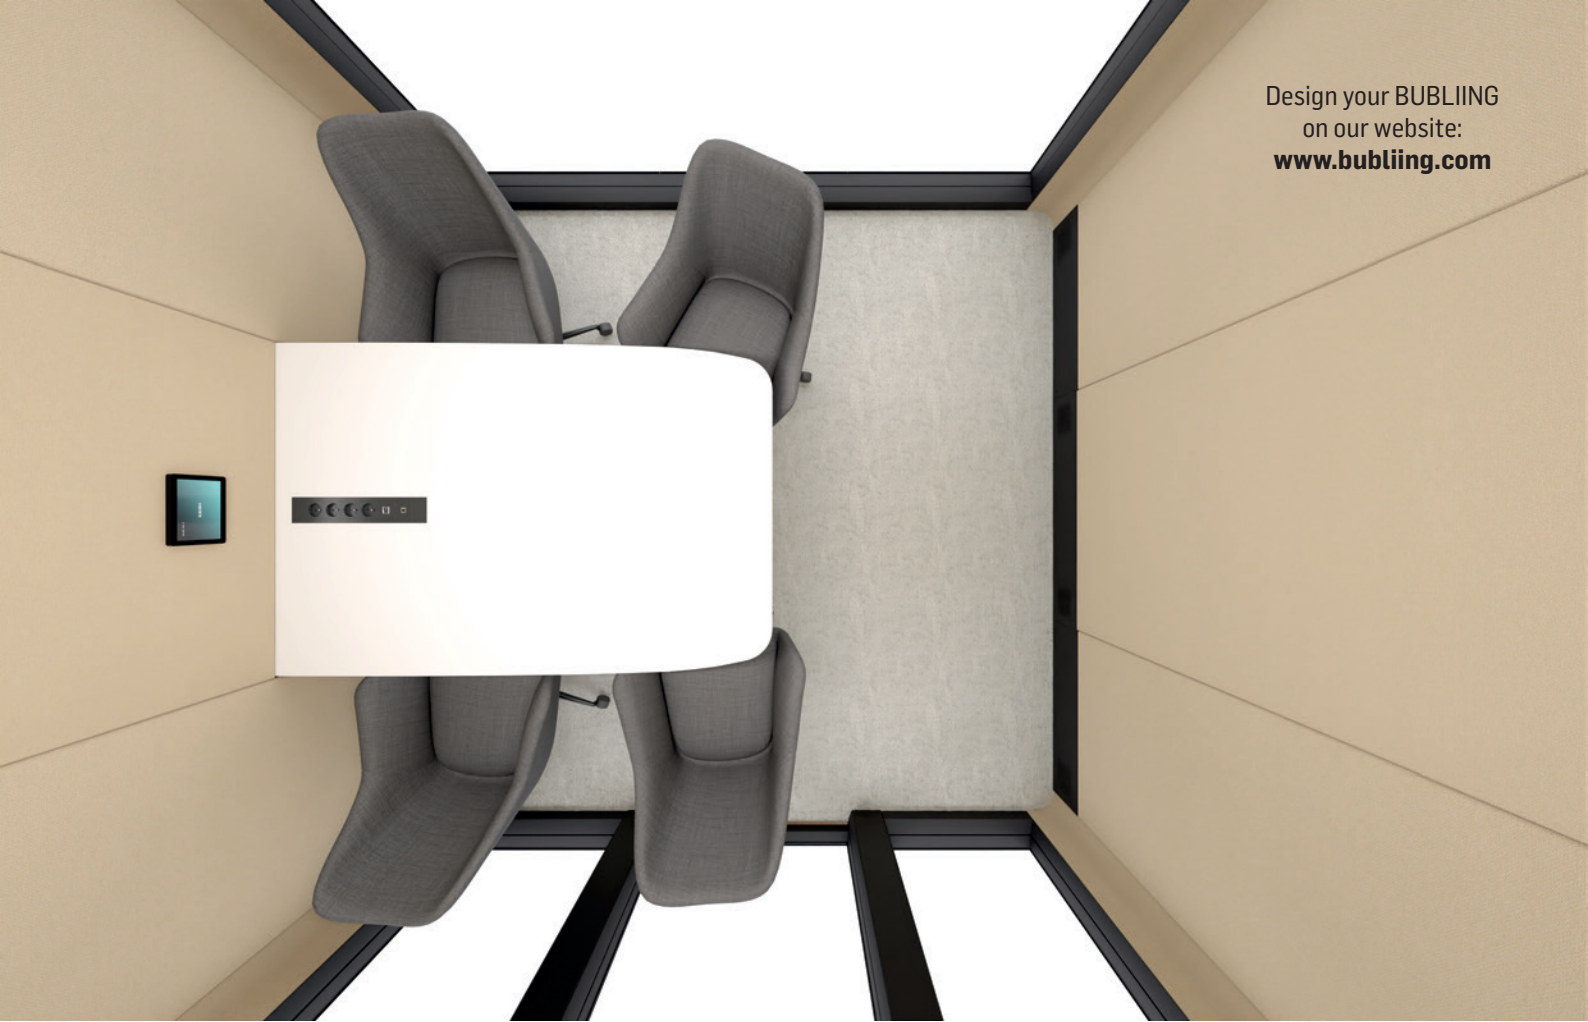

BUBLIING R | FINISHES





INTERIOR FINISH

 Beige CSE01	 Light Blue CSE38
 Light Gray CSE41	 Navy Blue CSE40
 Charcoal Gray CSE13	 Coral Red CSE24
 Brown Beige CSE02	 Classic Red CSE29
 Tea Green CSE33	 Yellow CSE03
 Olive Green CSE34	 Mustard CSE31




EXTERIOR COATING

 White RAL 9003 MATE	 Dark Blue RAL 5001 MATE
 Light Gray RAL 9002 MATE	 Light Blue RAL 5014 MATE
 Dark Gray RAL 7039 MATE	 Dark Green RAL 6028 MATE
 Black RAL 9005 MATE	 Light Green RAL 6021 MATE
 Red Beige RAL 3012 MATE	 Beige RAL 1001 MATE

INTERIOR FLOORING

 Beige 393100
 Brown 327260
 Dark gray 393350
 Light Gray 393300

TABLETOP

 Plywood with white laminated	 Plywood with anti-fingerprint black laminated	 Plywood with oak laminated
---	---	---

Due to the different configurations of monitors and printers, the appearance of the finishes may vary from the actual finish. To ensure that the chosen finishes meet your expectations, please refer to physical samples or contact a BUBLIING representative.

