

# BUBBLING



# A SPACE FOR EVERYONE



BUBLIING enhances the environments where people work by reducing noise and privacy issues in offices and other spaces. Since 2018, we have been dedicated to creating more comfortable, attractive, and functional products, believing that with them, people can achieve more and perform better. Our product family is made from durable and renewable materials, designed for a long lifespan and sustainability. Committed to finding solutions for success in the workplace, we are strongly focused on researching and developing the best options, always responding to the needs of our users.







## A SPACE FOR EVERYONE

# THE NEW ERA IN THE WORKPLACE

Office design is currently undergoing rapid and constant transformation.

This change is not just a temporary response to recent events but a reflection of broader shifts in the world of work.

In recent years, open-space offices have been promoted as the ideal work environments, a trend driven primarily by cost savings. With the rise of remote and flexible work, offices have had to reinvent themselves, offering more dynamic, adaptable spaces that are primarily focused on people and their needs.

Investing in the basics is crucial when redefining modern offices. Making them resemble a home-like environment has not only become the most widely used strategy for attracting employees worldwide but also enhances productivity and well-being. However, with technological advancements and the rise of hybrid teams, workdays are increasingly filled with virtual meetings, making open-space offices less efficient and productive due to increased noise and lack of privacy. This negatively impacts both productivity and individual satisfaction within



According to Passive Secrets, it is estimated that 75% of workers face distractions in the workplace, significantly hindering productivity. Studies show that distractions can reduce productive time to less than 60%.

organizations. The biggest challenge for companies is finding a balance between promoting collaborative work while also providing conditions that ensure individuality and concentration for their employees. The future of offices lies in a combination of open spaces, private zones for focus and privacy, and social areas that foster creativity and innovation. Each employee has different needs: while some thrive in constant idea exchange within social environments, others require quieter spaces where they can concentrate more intensely on individual tasks.


The harmony between individual well-being and collective performance is essential for a company to achieve high levels of efficiency and sustainability. Offices should be spaces that people want to return to, not out of obligation, but from a genuine desire to work for the company.

When the environment is welcoming, inspiring, and centered on the individual, a natural bond is created between the employee and the organization.



## A SPACE FOR EVERYONE

## OUR IDEAL SOLUTION

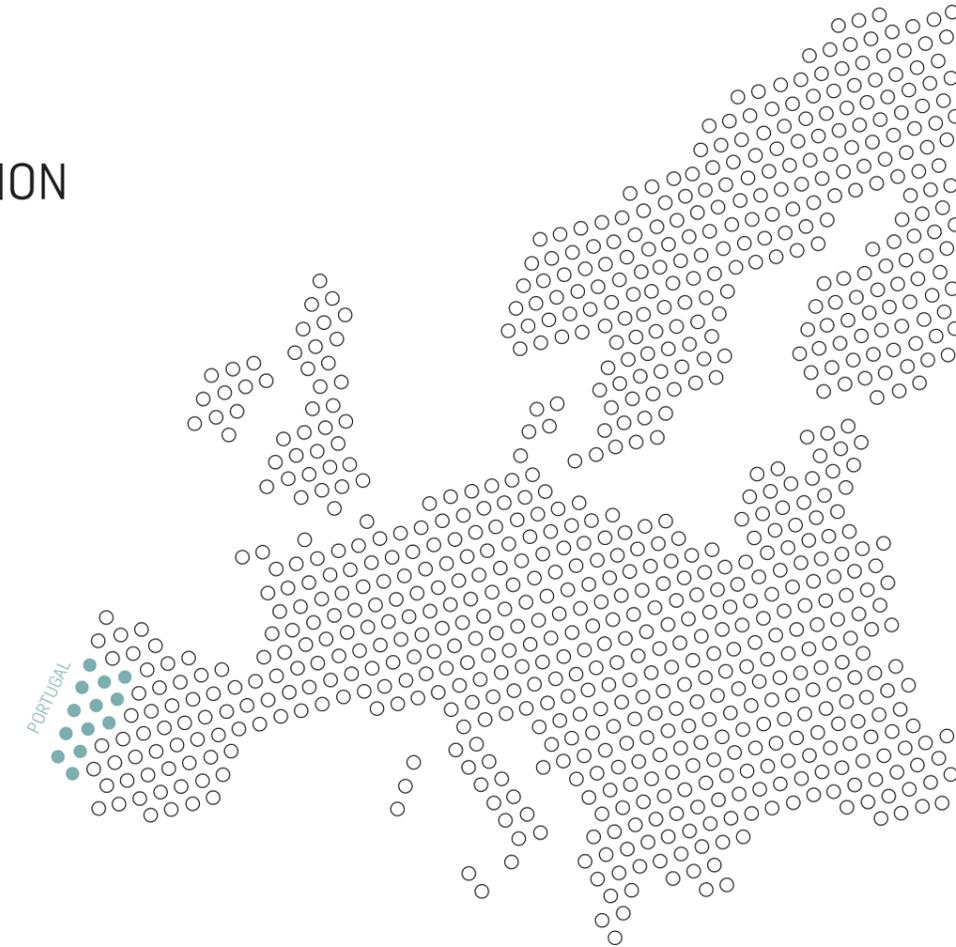

We all know how the mind loses focus and clarity after hours of work and constant distractions. How many times have you had to search for meeting rooms at the last minute, quiet spaces to take calls, or simply an area to focus without distractions?

BUBLIING is a brand designed and produced in Portugal, born out of a real and personal need. The problem was clear to us, which is why in 2018, we began designing our first BUBLIING.

We wanted to create a solution that provided the comfort necessary to focus. A space where we could be creative without distractions.

A space where we could do more and do it better.

Since then, our main focus has been to create spaces where people can feel like the best version of themselves.

And we succeeded. We now offer several models that are the result of a perfect combination of advanced technology, high-quality materials, and user-focused design.

Each BUBLIING is a personal retreat, ideal for calls, meetings, or simply moments of concentration.

We know that a harmonious work environment makes all the difference in productivity and well-being. That's why we have been committed, from the very beginning, to producing products that truly transform your workspace and make a difference.

WELCOME TO YOUR BUBLIING.

#### SOUNDPROOF - CLASE A

# >30dB

Guaranteed reduction in speech level according to the ISO 23351-1 testing method, with one of the best ratings in the industry.

#### SPECIFIC AIRFLOW RATE

# 21,3 h<sup>-1</sup>

Value determined in the laboratory according to the ISO 12569:2017.

The air is renewed, on average, every 5.6 minutes. In standby mode, the system activates for 10 minutes per hour.

#### LIGHTING

# 3500K-4000K

Adjustable lighting with LED temperature 3500K-4000K. Lighting up to 500 lux on the table.

#### A SPACE FOR EVERYONE

## THE FIRST STEP TO SILENCE AND FOCUS.

#### SIMPLICITY

We designed BUBLIING with the goal of simplifying everything to ensure an uncomplicated and satisfying experience. That's why we developed a modular design that allows for quick and intuitive assembly, ensuring not only practicality but also durability and comfort.

#### UNIVERSAL

Design crafted to adapt to various scenarios and be personalized according to your preferences. For us, there are two limitless truths: your creativity and our ability to meet your desires and needs.

We aim to offer solutions that go beyond your expectations, creating environments that truly represent your vision.

#### PRIVACY

Soundproof spaces, tested in accredited laboratories, ensure privacy and comfort, providing an ideal environment for productive work, phone calls, or virtual meetings. These acoustic isolation solutions create a distraction-free space, allowing clear and effective communication, which is essential for your daily performance.

#### COMFORT

Features such as ventilation, lighting, and acoustics are essential factors for user comfort and well-being. The continuous improvement of these elements and the constant pursuit of new solutions and technologies are among our main focuses.

#### CONNECTIVITY

The interior of BUBLIING has been designed in detail to provide everything you need, including connectivity. It is equipped with strategically placed power outlets and suitable supports for your meetings and video conferences, ensuring that communication is smooth and efficient.

#### ECONOMIC

A BUBLIING has lower costs compared to building a traditional, fixed meeting room. Additionally, assembly is quick, and its flexibility allows it to easily adapt to different spaces. With replaceable parts and the possibility of being transported during relocations, it offers a practical, economical, and sustainable solution without compromising functionality and comfort.



A SPACE FOR EVERYONE  
WORK WELL, LIVE BETTER

S



### **A SPACE FOR 1 PERSON**

Being the smallest of all models, it is perfect for providing you with full privacy for your phone calls, video meetings, or other small individual tasks.

EXT 1206x1006x2245 mm	INT 914x974x2060 mm
EXT 47,48x39,61x88,43 in	INT 35,89X38,31X81,10 in



MODEL | BUBLIING S

# SMALL IN SIZE, HUGE IN SOLUTIONS.



## GUARANTEED PRIVACY

Structure with a workspace that offers acoustic insulation >30dB Class A. This ensures that external noise won't disturb you, and due to its internal acoustics, it provides a private and comfortable space.



## ENHANCED VENTILATION

Ventilation system with adjustable airflow that can be quickly and intuitively controlled according to your needs. In standby mode, the fans operate for 10 minutes per hour to ensure the air is always refreshed.



## AUTOMATIC LIGHTING

LED lighting that can also be easily and quickly adjusted between 3500K-4000K according to your needs. BUBLIING detects when it is occupied and automatically notifies with an occupancy indicator, green or red.



## UNLIMITED CONNECTIVITY

It offers 1 standard SCHUKO outlet and 1 USB-C port, ensuring you are always connected, whether for charging your devices or using electronic appliances with ease.

**BUBLIING S | STANDARD FURNITURE**



**HIGH TABLE**  
730x400x1050 mm  
28,74x15,75x41,34 in



**CLOTHES HANGER**  
1 unit


**BUBLIING S | STANDARD FEATURES**



CONNECTIVITY




DIMMER SWITCH



OCCUPANCY INDICATOR

**BUBLIING S | OPTIONAL FURNITURE**

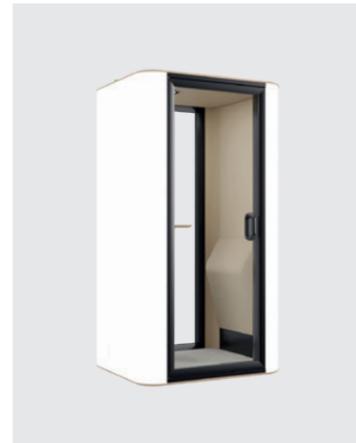

**BUBLIING S | OPTIONAL FEATURES**



CASTERS



AIR SPRING



WIRELESS CHARGER



CONTROL SCREEN




**LOW TABLE**  
730x400x730 mm  
28,74x15,75x28,74 in



**SOFA**  
730x570x810 mm  
28,74x22,44x31,89 in



**HIGH STOOL**  
400x400x580-780 mm  
15,75x15,75x22,83-30,71 in



**BACKREST**  
570x145x760 mm  
22,44x5,71x29,92 in



FACIAL LIGHT




LIFTING TABLE



SOFA CUSHION



BUBLIING FRESH AIR

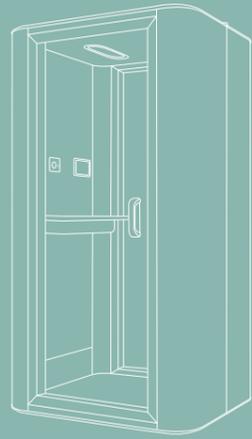


**MODELO BUBLIING S**  
TECHINICAL SPECIFICATIONS



## BUBLING S | TECHNICAL SPECIFICATIONS




### GENERAL DESCRIPTION

<b>Dimensions</b>	<p>Exterior: 1206x1006x2245 mm / 47,48x39,61x88,39 in</p> <p>Optional with wheels: Additional 52 mm / 2,05 in</p> <p>With Bubling Fresh Air: Additional 50 mm / 1,97 in</p> <p>Interior: 914x974x2060 mm / 35,98x38,35x81,10 in</p> <p>Entrance height: 86 mm / 3,39 in ; With casters: 138 mm / 5,43 in</p> <p>The door: 2108x825 mm / 82,99x32,48 in</p>
<b>Standard weight</b>	360 kg / 794 lb
<b>Acoustic</b>	<p>Class A   DB,A &gt;30 dB</p> <p>Guaranteed speech level reduction according to the ISO 23351-1 testing method, with one of the best ratings in the industry.</p>
<b>Sound production</b>	<p>Sound impact produced by the ventilation system.</p> <p>Interior: 36 dB at head height.</p> <p>Exterior: 25 dB at a distance of 1 meter.</p> <p>Test conducted according to ISO 11201:2010.</p>
<b>Fan airflow</b>	<p>Airflow: 280.4 m<sup>3</sup>/h (2 fans)</p> <p>The air is renewed, on average, every 5,6 minutes.</p> <p>The airflow can be manually adjusted.</p> <p>In standby mode, the system activates for 10 minutes per hour.</p>
<b>Lighting</b>	<p><b>Ceiling light:</b> LED lighting with a temperature of 3500 K - 4000 K, providing up to 500 lux on the desk.</p> <p><b>Facial light:</b> LED lighting with a temperature of 3500 K - 4000 K, providing up to 500 lux on the user's face.</p> <p>The lighting is automatic and can be manually adjusted.</p>
<b>Occupancy indicators</b>	LED sensor technology with red or green light indicator.
<b>Mobility</b>	<p>High-resistance adjusters accessible from inside the cabin.</p> <p>The BUBLING is prepared to accommodate casters (optional).</p> <p>The adjusters must be lifted to move the cabin and retracted when in the desired position.</p>

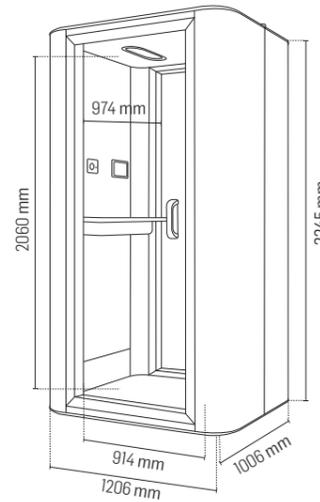

### MATERIALS

<b>Exterior</b>	<p><b>Exterior panels:</b> Made of thermocoated steel, replaceable in 10 available colors.</p> <p><b>Frame and door:</b> Made of aluminum coated in matte black RAL 9005, with an invisible pivot hinge.</p> <p><b>Handle:</b> Made of textured black polymer.</p> <p><b>Glass:</b> Clear acoustic glass, 8 mm / 0.31 in.</p>
<b>Interior</b>	<p><b>Structure:</b> Metal frame, wood, and recycled acoustic foam.</p> <p><b>Upholstery:</b> 100% polyester fabric available in 12 colors.</p> <p><b>Flooring:</b> 100% polyamide carpet available in 4 colors.</p> <p><b>Table:</b> Top and lower box made of birch plywood covered with white, fingerprint-resistant black laminate, or wood imitation laminate.</p>
<b>Standard furniture</b>	<p><b>Table dimensions:</b> 730x400x1050 mm / 28.74x15.94x41.34 in</p> <p><b>Table height:</b> 730 or 1050 mm / 28.74 or 41.34 in</p> <p>Maximum load for the table is 50 kg / 110.23 lbs</p> <p><b>Clothes hanger:</b> coated in textured black RAL 9005.</p>
<b>Furniture options</b>	<p><b>Sofa:</b> 730x570x810 mm / 28.74x22.44x31.89 in</p> <p><b>High stool:</b> 400x400x580-780 mm / 15.75x15.75x22.83-30.71 in</p> <p><b>Backrest:</b> 570x145x760 mm / 22.44x5.71x29.92 in</p> <p>These options are upholstered in 100% polyester fabric, available in 12 colors.</p> <p>The maximum load for the seat is 135 kg / 297.12 lbs.</p>



## BUBLING S | TECHNICAL SPECIFICATIONS

### SAFETY

<b>Fire protection</b>	<p>All coating materials, upholstery, and acoustic materials used in our products are tested and classified according to national or international standards.</p> <p><b>Fabrics:</b> EN 13501-1 Adhered Class B, s1, d0</p> <p><b>Foams:</b> ISO 3795</p> <p><b>Carpet:</b> EN 13501-1 CfI - s1</p> <p><b>Wood:</b> EN 13986, Class D-s2, d0</p>
<b>Earthquake resistance</b>	The BUBLING can be supplied with a system that allows fixation to the floor, available for seismic regions.

### ENERGY


<b>Electrical equipment</b>	<p>1x Schuko socket - 230V</p> <p>1x USB-C port</p> <p>Optional: USB-A port.</p>
<b>Standard consumption</b>	30 W
<b>Standby consumption</b>	0,74 W
<b>Equipment power</b>	AC output (electrical socket); 100-240 VAC, 16 A, 50-60 Hz.
<b>Charger output</b>	USB-C output 18 W

### EXTRA FEATURES

<b>Options</b>	<ul style="list-style-type: none"> <li>  7-inch manual <b>control screen</b>.</li> <li>  Metal hydraulic <b>air spring</b> for door closure.</li> <li>  Invisible <b>wireless charger</b> on the desk.</li> <li>  High-capacity load <b>casters</b>. The adjustment of the casters and leveling feet is done from inside the BUBLING.</li> <li>  Adjustable <b>facial light</b> up to 500 lux on the user's face.</li> <li>  <b>Bubling Fresh Air</b> system, non-adjustable and noise-free.</li> <li>  <b>Sofa cushion</b> upholstered in 100% polyester fabric, available in 12 colors.</li> <li>  <b>Adjustable height desk</b> system with a range of 730-1200 mm / 28.74x47.24 in.</li> </ul>
----------------	--

### SPACE AND INSTALLATION

<b>Required space</b>	Depth of the BUBLING: 1006 mm / 39.61 in + 100° door opening. Minimum recommended space for air circulation above and on the sides: 150 mm / 5.91 in.
<b>Installation space</b>	The installation requires 500 mm / 19.69 in of free space around the BUBLING.
<b>Assembly</b>	<p><b>Assembly time:</b> 30 minutes</p> <p><b>Number of people:</b> 2 people</p>

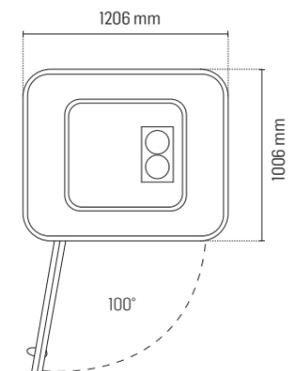



### **A TWICE SPACE FOR 1 PERSON**

Combines two BUBLING units, allowing two people to use them simultaneously and individually, performing tasks without compromising privacy while optimizing space.

EXT 2006x1006x2245 mm    INT 778x974x2060 mm  
EXT 78,98x39,61x88,43 in    INT 30,63x38,31x81,10 in



MODEL | BUBLIING Stwin

# TWICE THE PRIVACY, THE SAME EFFICIENCY.



## GUARANTEED PRIVACY

Structure with a workspace that offers acoustic insulation >30dB Class A.

This ensures that external noise won't disturb you, and due to its internal acoustics, it provides a private and comfortable space.



## ENHANCED VENTILATION

Ventilation system with adjustable airflow that can be quickly and intuitively controlled according to your needs. In standby mode, the fans operate for 10 minutes per hour to ensure the air is always refreshed.



## AUTOMATIC LIGHTING


LED lighting that can also be easily and quickly adjusted between 3500K-4000K according to your needs. BUBLIING detects when it is occupied and automatically notifies with an occupancy indicator, green or red.




## UNLIMITED CONNECTIVITY

It offers 1 standard SCHUKO outlet and 1 USB-C port in each space, ensuring you are always connected, whether for charging your devices or using electronic appliances with ease.

**BUBLIING Stwin | STANDARD FURNITURE**

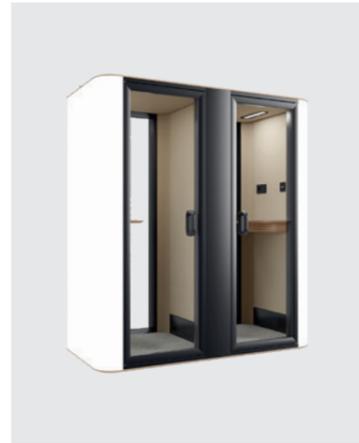

**HIGH TABLE**  
730x350x1050 mm  
28,74x13,78x41,34 in



**CLOTHES HANGER**  
1 unit in each space


**BUBLIING Stwin | STANDARD FEATURES**



**CONNECTIVITY**






**DIMMER SWITCH**



**OCCUPANCY INDICATOR**

**BUBLIING Stwin | OPTIONAL FURNITURE**

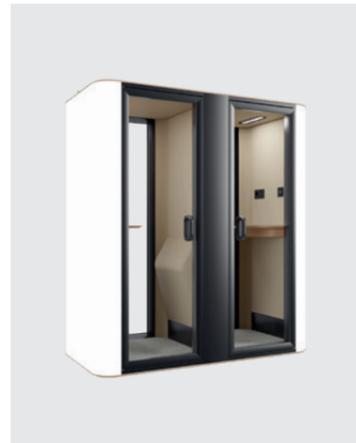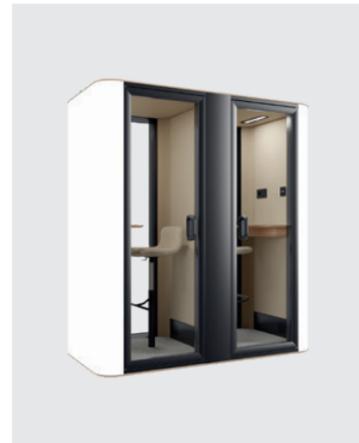

**HIGH STOOL**  
400x400x580-780 mm  
15,75x15,75x22,83-30,71 in



**BACKREST**  
570x145x760 mm  
22,44x5,71x29,92 in

**BUBLIING Stwin | OPTIONAL FEATURES**



**CASTERS**



**AIR SPRING**




**CONTROL SCREEN**



**FACIAL LIGHT**



**WIRELESS CHARGER**



**LIFTING TABLE**



**BUBLIING FRESH AIR**




**MODELO BUBLIING Stwin**  
TECHINICAL SPECIFICATIONS



## BUBLING Stwin | TECHNICAL SPECIFICATIONS



### GENERAL DESCRIPTION

<b>Dimensions</b>	<p>Exterior: 2006x1006x2245 mm / 78,98x39,61x88,39 in                      Optional with wheels: Additional 52 mm / 2,05 in                      With Bubling Fresh Air: Additional 50 mm / 1,97 in                      Interior: 778x974x2060 mm / 30,63x38,35x81,10 in                      Entrance height: 86 mm / 3,39 in ; With casters: 138 mm / 5,43 in                      The door: 2108x689 mm / 82,99x27,13 in</p>
<b>Standard weight</b>	590 kg / 1300 lb
<b>Acoustic</b>	<p>Class A   DB,A &gt;30 dB                      Guaranteed speech level reduction according to the ISO 23351-1 testing method, with one of the best ratings in the industry.</p>
<b>Sound production</b>	<p>Sound impact produced by the ventilation system.                      Interior: 36 dB at head height.                      Exterior: 25 dB at a distance of 1 meter.                      Test conducted according to ISO 11201:2010.</p>
<b>Fan airflow</b>	<p>Airflow: 560,8 m<sup>3</sup>/h (4 fans)                      The air is renewed, on average, every 5,6 minutes.                      The airflow can be manually adjusted.                      In standby mode, the system activates for 10 minutes per hour.</p>
<b>Lighting</b>	<p>Ceiling light: LED lighting with a temperature of 3500 K - 4000 K, providing up to 500 lux on the desk.                      Facial light: LED lighting with a temperature of 3500 K - 4000 K, providing up to 500 lux on the user's face.                      The lighting is automatic and can be manually adjusted.</p>
<b>Occupancy indicators</b>	LED sensor technology with red or green light indicator.
<b>Mobility</b>	<p>High-resistance adjusters accessible from inside the cabin.                      The BUBLING is prepared to accommodate casters (optional).                      The adjusters must be lifted to move the cabin and retracted when in the desired position.</p>

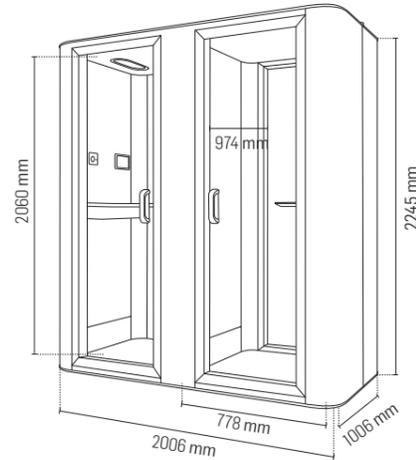

### MATERIALS

<b>Exterior</b>	<p>Exterior panels: Made of thermocoated steel, replaceable in 10 available colors.                      Frame and door: Made of aluminum coated in matte black RAL 9005, with an invisible pivot hinge.                      Handle: Made of textured black polymer.                      Glass: Clear acoustic glass, 8 mm / 0.31 in.</p>
<b>Interior</b>	<p>Structure: Metal frame, wood, and recycled acoustic foam.                      Upholstery: 100% polyester fabric available in 12 colors.                      Flooring: 100% polyamide carpet available in 4 colors.                      Table: Top and lower box made of birch plywood covered with white, fingerprint-resistant black laminate, or wood imitation laminate.</p>
<b>Standard furniture</b>	<p>Table dimensions: 730x350x1050 mm / 28.74x13.78x41.34 in                      Table height: 1050 mm / 41.34 in                      Maximum load for the table is 50kg / 110.23 lbs                      Clothes hanger: coated in textured black RAL 9005.</p>
<b>Furniture options</b>	<p>Backrest: 570x145x760 mm / 22.44x5.71x29.92 in                      High stool: 400x400x580-780 mm / 15.75x15.75x22.83-30.71 in                      These optional items are upholstered in 100% polyester fabric, available in 12 colors.                      Maximum load for the seat is 135 kg / 297.12 lbs.</p>

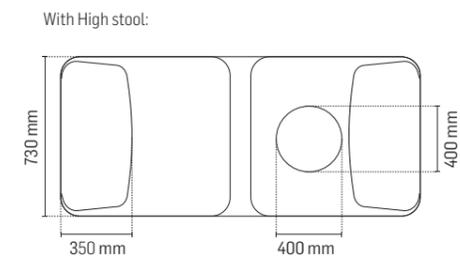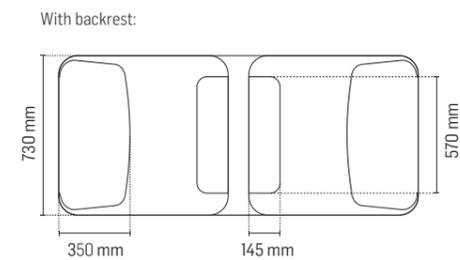

## BUBLING Stwin | TECHNICAL SPECIFICATIONS

### SAFETY

<b>Fire protection</b>	<p>All coating materials, upholstery, and acoustic materials used in our products are tested and classified according to national or international standards.</p> <p>Fabrics: EN 13501-1 Adhered Class B, s1, d0                      Foams: ISO 3795                      Carpet: EN 13501-1 Cf1 - s1                      Wood: EN 13986, Class D-s2, d0</p>
<b>Earthquake resistance</b>	The BUBLING can be supplied with a system that allows fixation to the floor, available for seismic regions.

### ENERGY


<b>Electrical equipment</b>	<p>In each booth:                      1x Schuko socket - 230 V                      1x USB-C port                      Optional: USB-A port.</p>
<b>Standard consumption</b>	60 W
<b>Standby consumption</b>	0,98 W
<b>Equipment power</b>	AC output (electrical socket); 100-240 VAC, 16 A, 50-60 Hz.
<b>Charger output</b>	USB-C output 18 W

### EXTRA FEATURES

<b>Options</b>	<ul style="list-style-type: none"> <li>7-inch manual control screen.</li> <li>Metal hydraulic air spring for door closure.</li> <li>Invisible wireless charger on the desk.</li> <li>High-capacity load casters. The adjustment of the casters and leveling feet is done from inside the BUBLING.</li> <li>Adjustable facial light up to 500 lux on the user's face.</li> <li>Bubling Fresh Air system, non-adjustable and noise-free.</li> <li>Adjustable height desk system with a range of 730-1200 mm / 28.74x47.24 in.</li> </ul>
----------------	--

### SPACE AND INSTALLATION

<b>Required space</b>	Depth of the BUBLING: 1006 mm / 39.61 in + 100° door opening. Minimum recommended space for air circulation above and on the sides: 150 mm / 5.91 in.
<b>Installation space</b>	The installation requires 500 mm / 19.69 in of free space around the BUBLING.
<b>Assembly</b>	<p>Assembly time: 1 hour                      Number of people: 2 people</p>

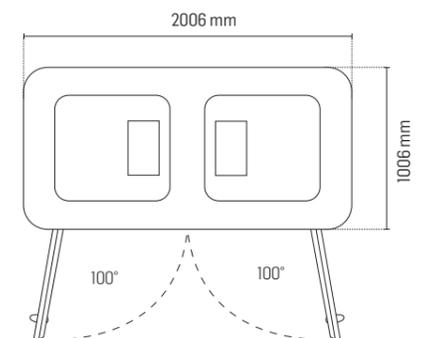

M



### **A SPACE FOR TWO PEOPLE**

For providing solutions for the most diverse needs, this model is the most flexible, ideal for holding small meetings for two or having a complete workspace at your disposal.

EXT 2006x1006x2245 mm    INT 1708x974x2060 mm  
EXT 78,98x39,61x88,43 in    INT 67,24x38,31x81,10 in



MODEL | BUBLIING M

# FLEXIBILITY AT ITS CORE.



## GUARANTEED PRIVACY

Structure with a workspace that offers acoustic insulation >30dB Class A. This ensures that external noise won't disturb you, and due to its internal acoustics, it provides a private and comfortable space.



## ENHANCED VENTILATION

Ventilation system with adjustable airflow that can be quickly and intuitively controlled according to your needs. In standby mode, the fans operate for 10 minutes per hour to ensure the air is always refreshed.



## AUTOMATIC LIGHTING

LED lighting that can also be easily and quickly adjusted between 3500K-4000K according to your needs. BUBLIING detects when it is occupied and automatically notifies with an occupancy indicator, green or red.



## UNLIMITED CONNECTIVITY

It offers 2 standard SCHUKO outlets, 1 USB-C port, and 1 USB-A port, ensuring you are always connected, whether for charging your devices or using electronic appliances with ease.

**BUBLING M | STANDARD FURNITURE**



**LOW TABLE**  
745x700x730 mm  
29,33x27,56x28,74 in



**SOFAS**  
730x570x810 mm  
28,74x22,44x31,89 in



**CLOTHES HANGERS**  
2 units

**BUBLING M | STANDARD FEATURES**



**CONNECTIVITY**






**DIMMER SWITCH**



**OCCUPANCY INDICATOR**

**BUBLING M | OPTIONAL FURNITURE**

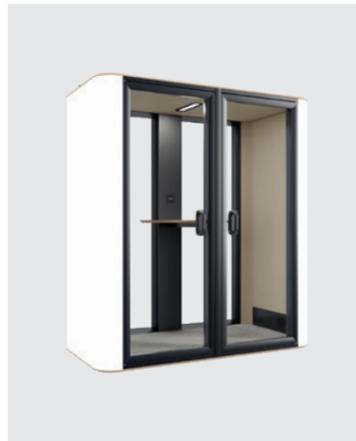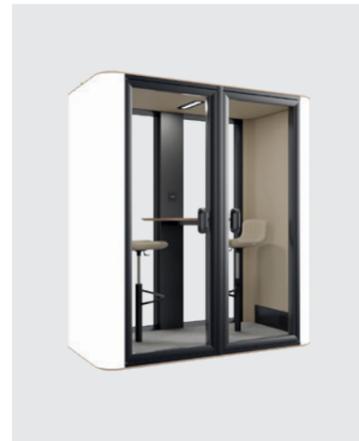

**HIGH TABLE**  
745x700x1050 mm  
29,33x27,56x41,34 in



**HIGH STOOL**  
400x400x580-780 mm  
15,75x15,75,39x22,83-30,71 in

**BUBLING M | OPTIONAL FEATURES**



**CASTERS**



**AIR SPRING**



**CONTROL SCREEN**




**SOFA CUSHION**



**INTERNAL MONITOR SUPPORT**



**BUBLING FRESH AIR**

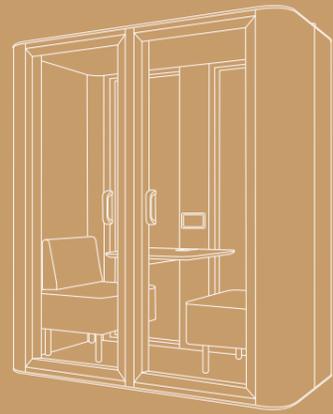


**MODELO BUBLIING M**  
TECHINICAL SPECIFICATIONS



## BUBLING M | TECHNICAL SPECIFICATIONS



### GENERAL DESCRIPTION

<b>Dimensions</b>	Exterior: 2006x1006x2245 mm / 78,98x39,61x88,39 in Optional with wheels: Additional 52 mm / 2,05 in With Bubling Fresh Air: Additional 50 mm / 1,97 in Interior: 1708x974x2060 mm / 67,24x38,35x81,10 in Entrance height: 86 mm / 3,39 in ; <b>With casters:</b> 138 mm / 5,43 in The door: 2108x774 mm / 82,99x30,47 in
<b>Standard weight</b>	510 kg / 1124 lb
<b>Acoustic</b>	<b>Class A   DB,A &gt;30 dB</b> Guaranteed speech level reduction according to the ISO 23351-1 testing method, with one of the best ratings in the industry.
<b>Fan airflow</b>	<b>Airflow:</b> 560,8 m <sup>3</sup> /h (2 fans) The air is renewed, on average, every 5,6 minutes. The airflow can be manually adjusted. In standby mode, the system activates for 10 minutes per hour.
<b>Lighting</b>	<b>Ceiling light:</b> LED lighting with a temperature of 3500 K - 4000 K, providing up to 500 lux on the desk. The lighting is automatic and can be manually adjusted.
<b>Occupancy indicators</b>	LED sensor technology with red or green light indicator.
<b>Mobility</b>	High-resistance adjusters accessible from inside the cabin. The BUBLING is prepared to accommodate casters (optional). The adjusters must be lifted to move the cabin and retracted when in the desired position.

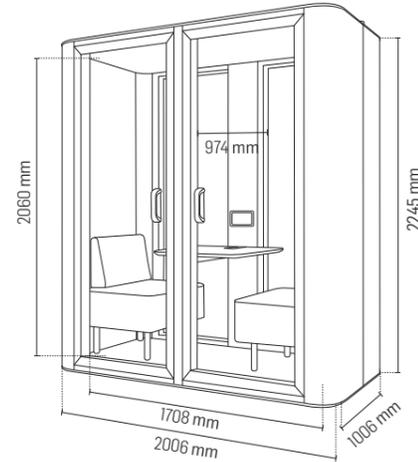

### MATERIALS

<b>Exterior</b>	<b>Exterior panels:</b> Made of thermocoated steel, replaceable in 10 available colors. <b>Frame and door:</b> Made of aluminum coated in matte black RAL 9005, with an invisible pivot hinge. <b>Handle:</b> Made of textured black polymer. <b>Glass:</b> Clear acoustic glass, 8 mm / 0.31 in.
<b>Interior</b>	<b>Structure:</b> Metal frame, wood, and recycled acoustic foam. <b>Upholstery:</b> 100% polyester fabric available in 12 colors. <b>Flooring:</b> 100% polyamide carpet available in 4 colors. <b>Table:</b> Top and lower box made of birch plywood covered with white, fingerprint-resistant black laminate, or wood imitation laminate.
<b>Standard furniture</b>	<b>Table dimensions:</b> 745x700x730 mm / 29.33x27.56x28.74 in <b>Table height:</b> 730 or 1050 mm / 28.74 or 41.34 in Maximum load for the table is 50kg / 110.23 lbs <b>Sofa dimensions:</b> 730x570x810 mm / 28.74x22.44x31.89 in Sofa upholstered in 100% polyester fabric, available in 12 colors. <b>Clothes hangers (2):</b> coated in textured black RAL 9005.
<b>Furniture options</b>	<b>High stool:</b> 400x400x580-780 mm / 15.75x15.75x22.83-30.71 in These optional items are upholstered in 100% polyester fabric, available in 12 colors.

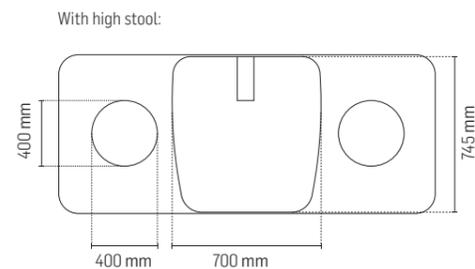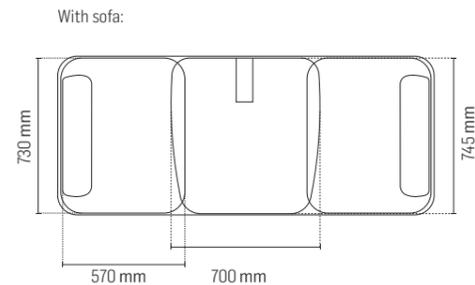

## BUBLING M | TECHNICAL SPECIFICATIONS

### SAFETY

<b>Fire protection</b>	All coating materials, upholstery, and acoustic materials used in our products are tested and classified according to national or international standards.  <b>Fabrics:</b> EN 13501-1 Adhered Class B, s1, d0 <b>Foams:</b> ISO 3795 <b>Carpet:</b> EN 13501-1 CfL – s1 <b>Wood:</b> EN 13986, Class D-s2, d0
<b>Earthquake resistance</b>	The BUBLING can be supplied with a system that allows fixation to the floor, available for seismic regions.

### ENERGY


<b>Electrical equipment</b>	2x Schuko sockets - 230 V 1x USB-C port 1x USB-A port Optional: RJ45 network socket; HDMI port.
<b>Standard consumption</b>	60 W
<b>Standby consumption</b>	0,74 W
<b>Equipment power</b>	AC output (electrical socket); 100-240 VAC, 16 A, 50-60 Hz.
<b>Charger output</b>	USB-C output 18 W

### EXTRA FEATURES

<b>Options</b>	7-inch manual <b>control screen</b> .   Metal hydraulic <b>air spring</b> for door closure.   High-capacity load <b>casters</b> . The adjustment of the casters and leveling feet is done from inside the BUBLING.   <b>Bubling Fresh Air</b> system, non-adjustable and noise-free.   <b>Internal metal monitor support</b> with VESA mounting. Monitor not included. Maximum monitor size is 32/42 inches.
----------------	--

### SPACE AND INSTALLATION

<b>Required space</b>	Depth of the BUBLING: 1006 mm / 39.61 in + 100° door opening. Minimum recommended space for air circulation above and on the sides: 150 mm / 5.91 in.
<b>Installation space</b>	The installation requires 500 mm / 19.69 in of free space around the BUBLING.
<b>Assembly</b>	<b>Assembly time:</b> 1 hour <b>Number of people:</b> 2 people

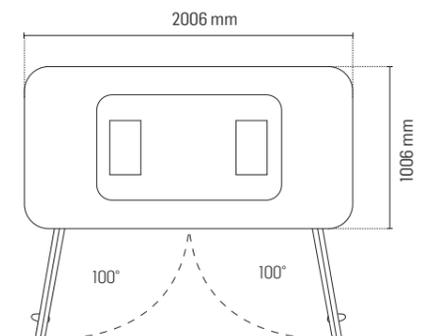



### **A SPACE FOR FOUR PEOPLE**

It stands out for its versatility. It offers a quiet space to meet in small groups, with functional furniture and support materials for presentations or strategic planning.

EXT 2356x1456x2245 mm	INT 2058x1426x2114 mm
EXT 92,91x57,32x88,43 in	INT 81,02x56,06x83,27 in



MODEL | BUBLIING L

# ALL THE ANSWERS IN ONE PLACE.



## GUARANTEED PRIVACY

Structure with a workspace that offers acoustic insulation >30dB Class A. This ensures that external noise won't disturb you, and due to its internal acoustics, it provides a private and comfortable space.



## ENHANCED VENTILATION

Ventilation system with adjustable airflow that can be quickly and intuitively controlled according to your needs. In standby mode, the fans operate for 10 minutes per hour to ensure the air is always refreshed.



## INCLUSIVE BUBLIING

This model offers the option of the PMR set, which includes a retractable table and sofas, access ramp, support bars inside the doors, and protective plates for the doors, providing greater accessibility and comfort for people with reduced mobility.



## AUTOMATIC LIGHTING


LED lighting that can also be easily and quickly adjusted between 3500K-4000K according to your needs. BUBLIING detects when it is occupied and automatically notifies with an occupancy indicator, green or red.



## UNLIMITED CONNECTIVITY

It offers 2 standard SCHUKO outlets, 1 USB-C port, and 1 USB-A port, ensuring you are always connected, whether for charging your devices or using electronic appliances with ease.


**BUBLIING L | STANDARD FURNITURE**



**LOW TABLE**  
1195x830x730 mm  
47,05x32,68x28,74 in



**SOFAS**  
1173x570x810 mm  
46,18x22,44x31,89 in



**CLOTHES HANGERS**  
2 units


**BUBLIING L | STANDARD FEATURES**



**CONNECTIVITY**





**DIMMER SWITCH**



**OCCUPANCY INDICATOR**

**BUBLIING L | OPTIONAL FURNITURE**

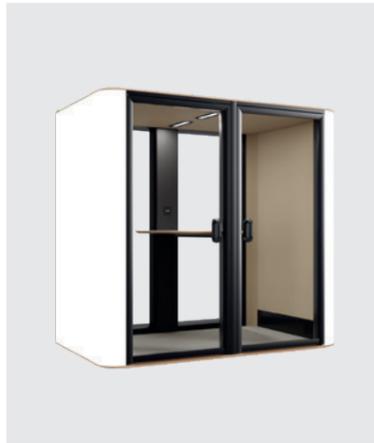

**HIGH TABLE**  
1195x830x1050 mm  
47,05x32,68x41,34 in

**BUBLIING L | OPTIONAL FEATURES**



**AIR SPRING**



**BUBLIING FRESH AIR**




**CONTROL SCREEN**



**SOFA CUSHION**

**BUBLIING L | OPTIONAL PMR**



**RETRACTABLE TABLE AND SOFAS**  
Table: 1195x810x730 mm /  
47,05x31,89x28,74 in.  
Sofas: 1178x610x490 mm /  
46,42x24,02x19,29 in.



**SUPPORT BARS**  
1 unit inside each door, at a height  
of 850 mm / 33.46 in.



**PROTECTION PLATES**  
Inside and outside of the doors.  
840x180 mm / 33.07x7.09 in.



**INTERNAL MONITOR SUPPORT**



**EXTERNAL MONITOR SUPPORT**



**EXTERNAL WHITE BOARD**




**MODELO BUBLIING L**  
TECHINICAL SPECIFICATIONS



## BUBLIING L | TECHNICAL SPECIFICATIONS



### GENERAL DESCRIPTION

<b>Dimensions</b>	<p>Exterior: 2356x1456x2245 mm / 92,76x57,32x88,39 in                      With Bubliling Fresh Air: Additional 50 mm / 1,97 in                      Interior: 2058x1426x2114 mm / 81,09x56,14x83,23 in                      Entrance height: 23 mm / 0,91 in                      The door: 2134x949 mm / 83,90x37,36 in</p>
<b>Standard weight</b>	740 kg / 1632 lb
<b>Acoustic</b>	<p>Class A   DB, A &gt;30 dB                      Guaranteed speech level reduction according to the ISO 23351-1 testing method, with one of the best ratings in the industry.</p>
<b>Fan airflow</b>	<p>Airflow: 1121,6 m<sup>3</sup>/h (8 fans)                      The air is renewed, on average, every 5,6 minutes.                      The airflow can be manually adjusted.                      In standby mode, the system activates for 10 minutes per hour.</p>
<b>Lighting</b>	<p>Ceiling light: LED lighting with a temperature of 3500 K - 4000 K, providing up to 500 lux on the desk.                      The lighting is automatic and can be manually adjusted.</p>
<b>Occupancy indicators</b>	LED sensor technology with red or green light indicator.
<b>Mobility</b>	<p>High-strength levelers adjustable from inside the booth.                      The BUBLIING is designed for people with limited mobility and wheelchairs. Ramp with an entrance of 780 mm / 30.71 in.</p>

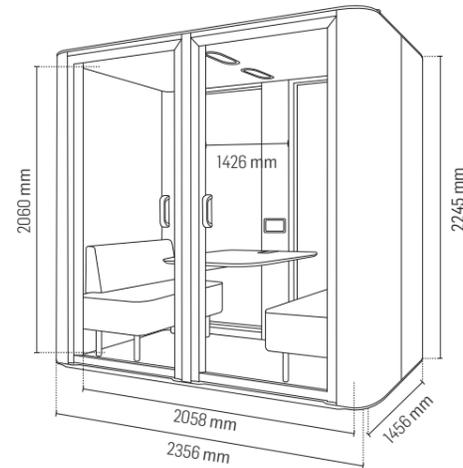

### MATERIALS

<b>Exterior</b>	<p>Exterior panels: Made of thermocoated steel, replaceable in 10 available colors.                      Frame and door: Made of aluminum coated in matte black RAL 9005, with an invisible pivot hinge.                      Handle: Made of textured black polymer.                      Glass: Clear acoustic glass, 8 mm / 0.31 in.</p>
<b>Interior</b>	<p>Structure: Metal frame, wood, and recycled acoustic foam.                      Upholstery: 100% polyester fabric available in 12 colors.                      Flooring: 100% polyamide carpet available in 4 colors.                      Table: Top and lower box made of birch plywood covered with white, fingerprint-resistant black laminate, or wood imitation laminate.</p>
<b>Standard furniture</b>	<p>Table dimensions: 1195x830x730 mm / 47.05x32.68x28.74 in                      Table height: 730 or 1050 mm / 28.74 or 41.34 in                      Maximum load for the table is 50kg / 110.23 lbs                      Sofa dimensions: 1173x570x810 mm / 46.18x22.44x31.89 in                      Sofa upholstered in 100% polyester fabric, available in 12 colors.                      Clothes hangers (2): coated in textured black RAL 9005.</p>
<b>Options PMR</b>	<p>Retractable table: 1195x810x730 mm / 47.05x31.89x28.74 in                      Retractable sofa: 1178x610x490 mm / 46.42x24.02x19.29 in                      Support bars (2): located on the door, inside, with a height of 850 mm / 33.46 in                      Protection plates (4): for the door, inside and outside: 840x180 mm / 33.07x7.09 in</p>

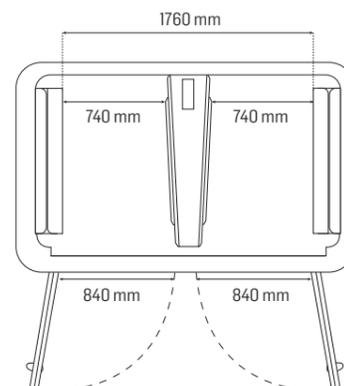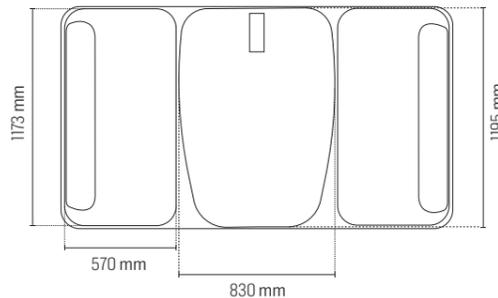

## BUBLIING L | TECHNICAL SPECIFICATIONS

### SAFETY

<b>Fire protection</b>	<p>All coating materials, upholstery, and acoustic materials used in our products are tested and classified according to national or international standards.</p> <p>Fabrics: EN 13501-1 Adhered Class B, s1, d0                      Foams: ISO 3795                      Carpet: EN 13501-1 Cfl - s1                      Wood: EN 13986, Class D-s2, d0</p>
<b>Earthquake resistance</b>	The BUBLIING can be supplied with a system that allows fixation to the floor, available for seismic regions.

### ENERGY


<b>Electrical equipment</b>	<p>2x Schuko sockets - 230 V                      1x USB-C port                      1x USB-A port                      Optional: RJ45 network socket; HDMI port.</p>
<b>Standard consumption</b>	93 W
<b>Standby consumption</b>	0,74 W
<b>Equipment power</b>	AC output (electrical socket); 100-240 VAC, 16 A, 50-60 Hz.
<b>Charger output</b>	USB-C output 18 W

### EXTRA FEATURES

<b>Options</b>	<ul style="list-style-type: none"> <li>7-inch manual control screen.</li> <li>Metal hydraulic air spring for door closure.</li> <li>Bubliling Fresh Air system, non-adjustable and noise-free.</li> <li>Internal metal monitor support with VESA mounting. Monitor not included. Maximum monitor size is 32/42 inches.</li> <li>Exterior whiteboard 1040x910 mm / 40.94x35.83 in</li> </ul>
----------------	---

### SPACE AND INSTALLATION

<b>Required space</b>	BUBLIING depth: 1456 mm / 57.32 in + Door opening of 100°. Minimum recommended space for air circulation above and on the sides: 150 mm / 5.91 in.
<b>Installation space</b>	The installation requires 500 mm / 19.69 in of free space around the BUBLIING.
<b>Assembly</b>	<p>Assembly time: 2 hours                      Number of people: 3 people</p>

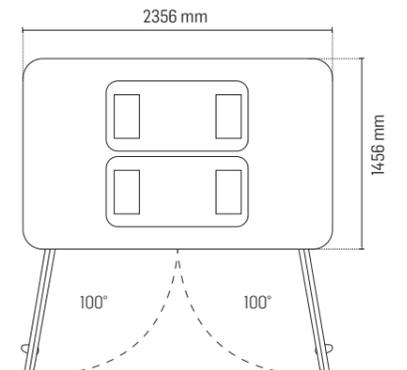

**XL**



### **A SPACE FOR SIX PEOPLE**

This model takes versatility to another level. It creates a serene environment for larger team meetings, offering functional equipment for presentations or strategic planning sessions.

EXT 2356x2006x2245 mm    INT 2085x1976x2114 mm  
EXT 92,91x78,94x88,43 in    INT 88,09x77,87x83,27 in



## MODEL | BUBLIING XL

# EXPAND THE POSSIBILITIES ELEVATE THE EXPECTATIONS.



### GUARANTEED PRIVACY

Structure with a workspace that offers acoustic insulation >30dB Class A. This ensures that external noise won't disturb you, and due to its internal acoustics, it provides a private and comfortable space.



### ENHANCED VENTILATION

Ventilation system with adjustable airflow that can be quickly and intuitively controlled according to your needs. In standby mode, the fans operate for 10 minutes per hour to ensure the air is always refreshed.



### INCLUSIVE BUBLIING

This model offers the option of the PMR set, which includes a retractable table and sofas, access ramp, support bars inside the doors, and protective plates for the doors, providing greater accessibility and comfort for people with reduced mobility.



### AUTOMATIC LIGHTING

LED lighting that can also be easily and quickly adjusted between 3500K-4000K according to your needs. BUBLIING detects when it is occupied and automatically notifies with an occupancy indicator, green or red.



### UNLIMITED CONNECTIVITY

It offers 3 standard SCHUKO outlets, 1 USB-C port, 1 USB-A port, and 1 RJ45 port, ensuring you are always connected, whether for charging your devices or using electronic appliances with ease.

**BUBLIING XL | STANDARD FURNITURE**



**LOW TABLE**  
1745x870x730 mm  
68,70x34,25x28,74 in



**SOFA**  
1720x570x810 mm  
67,72x22,44x31,89 in



**CLOTHES HANGERS**  
2 units

**BUBLIING XL | STANDARD FEATURES**



**CONNECTIVITY**




**DIMMER SWITCH**



**OCCUPANCY INDICATOR**

**BUBLIING XL | OPTIONAL FURNITURE**



**HIGH TABLE**  
1745x870x1050 mm  
68,70x34,25x41,34 in

**BUBLIING XL | OPTIONAL FEATURES**



**AIR SPRING**



**BUBLIING FRESH AIR**



**CONTROL SCREEN**




**SOFA CUSHION**

**BUBLIING XL | OPTIONAL PMR**



**RETRACTABLE TABLE AND SOFAS**  
Table: 1745x850x730 mm /  
68,70x33,46x28,74 in.  
Sofas: 1720x570x490 mm /  
67,72x22,44x19,29 in.



**SUPPORT BARS**  
1 unit inside each door, at a height  
of 850 mm / 33,46 in de altura.



**PROTECTION PLATES**  
Inside and outside of the doors.  
840x180 mm / 33,07x7,09 in



**INTERNAL MONITOR SUPPORT**



**EXTERNAL MONITOR SUPPORT**



**EXTERNAL WHITE BOARD**




**MODELO BUBLINO XL**  
**TECHNICAL SPECIFICATIONS**



## BUBLING XL | TECHNICAL SPECIFICATIONS



### GENERAL DESCRIPTION

<b>Dimensions</b>	Exterior: 2356x2006x2245 mm / 92,76x78,98x88,39 in With Bubling Fresh Air: Adicionais 50 mm / 1,97 in Interior: 2085x1976x2114 mm / 82,09x77,80x83,23 in Entrance height: 23 mm / 0,91 in The door: 2134x949 mm / 83,90x37,36 in
<b>Standard weight</b>	930 kg / 2059 lb
<b>Acoustic</b>	<b>Class A   DB,A &gt;30 dB</b> Guaranteed speech level reduction according to the ISO 23351-1 testing method, with one of the best ratings in the industry.
<b>Fan airflow</b>	<b>Airflow:</b> 1121,6 m <sup>3</sup> /h (8 fans) The air is renewed, on average, every 5,6 minutes. The airflow can be manually adjusted. In standby mode, the system activates for 10 minutes per hour.
<b>Lighting</b>	<b>Ceiling light:</b> LED lighting with a temperature of 3500 K - 4000 K, providing up to 500 lux on the desk. The lighting is automatic and can be manually adjusted.
<b>Occupancy indicators</b>	LED sensor technology with red or green light indicator.
<b>Mobility</b>	High-strength levelers adjustable from inside the booth. The BUBLING is designed for people with limited mobility and wheelchairs. Ramp with an entrance of 780 mm / 30.71 in.

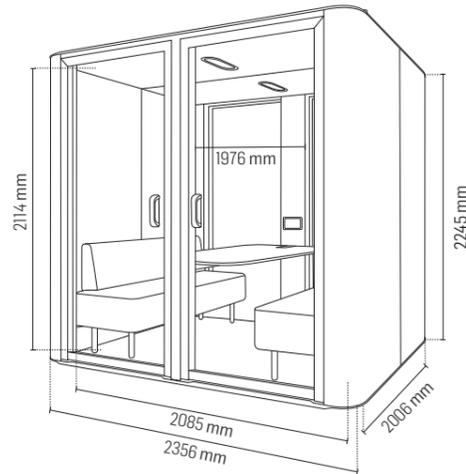

### MATERIALS

<b>Exterior</b>	<b>Exterior panels:</b> Made of thermocoated steel, replaceable in 10 available colors. <b>Frame and door:</b> Made of aluminum coated in matte black RAL 9005, with an invisible pivot hinge. <b>Handle:</b> Made of textured black polymer. <b>Glass:</b> Clear acoustic glass, 8 mm / 0.31 in.
<b>Interior</b>	<b>Structure:</b> Metal frame, wood, and recycled acoustic foam. <b>Upholstery:</b> 100% polyester fabric available in 12 colors. <b>Flooring:</b> 100% polyamide carpet available in 4 colors. <b>Table:</b> Top and lower box made of birch plywood covered with white, fingerprint-resistant black laminate, or wood imitation laminate.
<b>Standard furniture</b>	<b>Table dimensions:</b> 1745x870x730 mm / 68.70x34.25x28.74 in <b>Table height:</b> 730 or 1050 mm / 28.74 or 41.34 in Maximum load for the table is 50 kg / 110.23 lbs <b>Sofa dimensions:</b> 1720x570x810 mm / 67.72x22.44x31.89 in Sofa upholstered in 100% polyester fabric, available in 12 colors. <b>Clothes hangers (2):</b> coated in textured black RAL 9005.
<b>Options PMR</b>	<b>Retractable table:</b> 1745x850x730 mm / 68.70x33.46x28.74 in <b>Retractable sofa:</b> 1720x570x490 mm / 67.72x22.44x19.29 in <b>Support bars (2):</b> located on the door, inside, with a height of 850 mm / 33.46 in <b>Protection plates (4):</b> for the door, inside and outside: 840x180 mm / 33.07x7.09 in

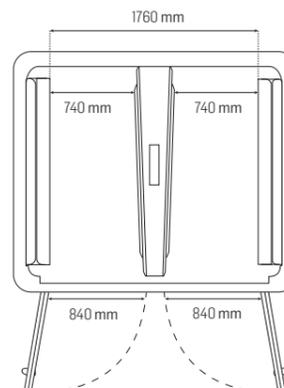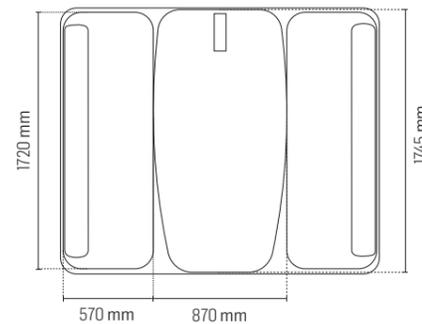

## BUBLING XL | TECHNICAL SPECIFICATIONS

### SAFETY

<b>Fire protection</b>	All coating materials, upholstery, and acoustic materials used in our products are tested and classified according to national or international standards.  <b>Fabrics:</b> EN 13501-1 Adhered Class B, s1, d0 <b>Foams:</b> ISO 3795 <b>Carpet:</b> EN 13501-1 CfI – s1 <b>Wood:</b> EN 13986, Class D-s2, d0
<b>Earthquake resistance</b>	The BUBLING can be supplied with a system that allows fixation to the floor, available for seismic regions.

### ENERGY


<b>Electrical equipment</b>	3x Schuko sockets - 230 V 1x USB-C port 1x USB-A port 1x RJ45 network socket Optional: HDMI port
<b>Standard consumption</b>	118 W
<b>Standby consumption</b>	0,74 W
<b>Equipment power</b>	AC output (electrical socket); 100-240 VAC, 16 A, 50-60 Hz.
<b>Charger output</b>	USB-C output 18 W

### EXTRA FEATURES

<b>Opcionais</b>	7-inch manual <b>control screen</b> .   Metal hydraulic <b>air spring</b> for door closure.   <b>Bubling Fresh Air</b> system, non-adjustable and noise-free.   <b>Internal metal monitor support</b> with VESA mounting. Monitor not included. Maximum monitor size is 32/42 inches.   <b>Exterior whiteboard</b> 1594x910 mm / 62,76x35,83 in
------------------	---

### SPACE AND INSTALLATION

<b>Required space</b>	BUBLING depth: 2006 mm / 78,98 in + Door opening of 100°. Minimum recommended space for air circulation above and on the sides: 150 mm / 5.91 in.
<b>Installation space</b>	A instalação requer 500 mm / 19,69 in de espaço livre ao redor da BUBLING.
<b>Assembly</b>	<b>Assembly time:</b> 2 hours <b>Number of people:</b> 3 people

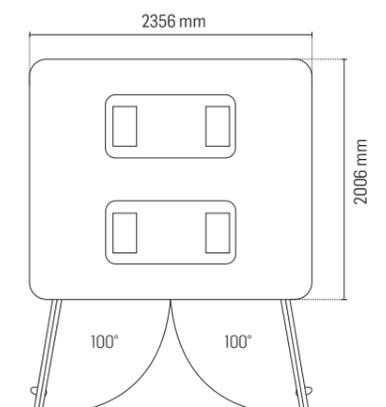

R



### **A SPACE FOR EIGHT PEOPLE**

Being the largest of all models, this BUBLING redefines the limits of flexibility and mobility. Its innovation provides freedom of movement, offering a space that adapts to various layouts.

EXT 3000x3000x2245 mm    INT 2708x2976x2114 mm  
EXT 118,46x118,46x88,43 in    INT 88,09x77,87x83,27 in



MODEL | BUBLIING R

# WITH EVERY STEP, A SPACE WITHOUT LIMITS.



## GUARANTEED PRIVACY

Structure with a workspace that offers acoustic insulation >30dB Class A.

This ensures that external noise won't disturb you, and due to its internal acoustics, it provides a private and comfortable space.



## ENHANCED VENTILATION

Ventilation system with adjustable airflow that can be quickly and intuitively controlled according to your needs. In standby mode, the fans operate for 10 minutes per hour to ensure the air is always refreshed.



## INCLUSIVE BUBLIING

This model offers the PMR set option, which includes an access ramp, support bars inside the doors, and protective plates for the doors, providing greater accessibility and comfort for people with reduced mobility.



## AUTOMATIC LIGHTING

LED lighting that can also be easily and quickly adjusted between 3500K-4000K according to your needs. BUBLIING detects when it is occupied and automatically notifies with an occupancy indicator, green or red.




## UNLIMITED CONNECTIVITY

It offers 4 standard SCHUKO outlets, 1 USB-C port, 1 USB-A port, and 1 RJ45 port, ensuring you are always connected, whether for charging your devices or using electronic appliances with ease.

**BUBLIING R | STANDARD FURNITURE**




**LOW TABLE FOR 6 PEOPLE**  
1400x1000x730 mm /  
55,12x39,37x28,74 in



**CLOTHES HANGERS**  
4 units




**HIGH TABLE FOR 6 PEOPLE**  
1400x1000x1050 mm /  
55,12x39,37x41,34 in



**CLOTHES HANGERS**  
4 units




**LOW TABLE FOR 6 PEOPLE**  
1800x1000x730 mm /  
70,87x39,37x28,74 in



**CLOTHES HANGERS**  
4 units



**HIGH TABLE FOR 8 PEOPLE**  
1800x1000x1050 mm /  
70,87x39,37x41,344 in




**CLOTHES HANGERS**  
4 units

**BUBLIING R | STANDARD FEATURES**



**CONNECTIVITY**



**CONTROL SCREEN**



**OCCUPANCY INDICATOR**

**BUBLIING R | OPTIONAL FEATURES**



**AIR SPRING**



**BUBLIING FRESH AIR**



**INTERNAL MONITOR SUPPORT**



**EXTERNAL MONITOR SUPPORT**



**EXTERNAL WHITE BOARD**



**INTERNAL WHITE BOARD**


**BUBLIING R | OPTIONAL PMR**



**SUPPORT BARS**



**PROTECTION PLATES**

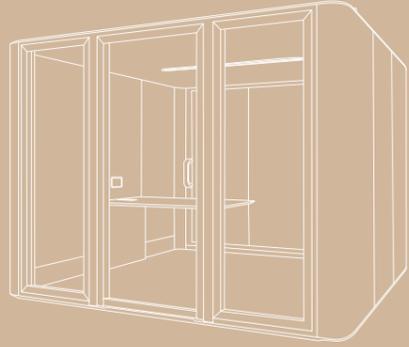


**MODELO BUBLIING R**  
TECHINICAL SPECIFICATIONS



## BUBLING R | TECHNICAL SPECIFICATIONS

### GENERAL DESCRIPTION

<b>Dimensions</b>	Exterior: 3000x3000x2245 mm / 118,11x118,11x88,39 in With Bubling Fresh Air: Adicionais 50 mm / 1,97 in Interior: 2708x2976x2114 mm / 106,61x117,17x83,23 in Entrance height: 23 mm / 0,91 in The door: 2134x949 mm / 83,90x37,36in
<b>Standard weight</b>	1120 kg / 2467 lb
<b>Acoustic</b>	Class A   DB,A >30 dB Guaranteed speech level reduction according to the ISO 23351-1 testing method, with one of the best ratings in the industry.
<b>Fan airflow</b>	Airflow: 1402 m <sup>3</sup> /h (10 fans) The air is renewed, on average, every 5,6 minutes. The airflow can be manually adjusted. In standby mode, the system activates for 10 minutes per hour.
<b>Lighting</b>	<b>Ceiling light:</b> LED lighting with a temperature of 3500 K - 4000 K, providing up to 500 lux on the desk. The lighting is automatic and can be manually adjusted.
<b>Occupancy indicators</b>	LED sensor technology with red or green light indicator.
<b>Mobility</b>	High-strength levelers adjustable from inside the booth. The BUBLING is designed for people with limited mobility and wheelchairs. Ramp with an entrance of 780 mm / 30.71 in.
<b>Manual control</b>	7-inch manual control screen. Controls lighting (intensity and color), ventilation, among other features.

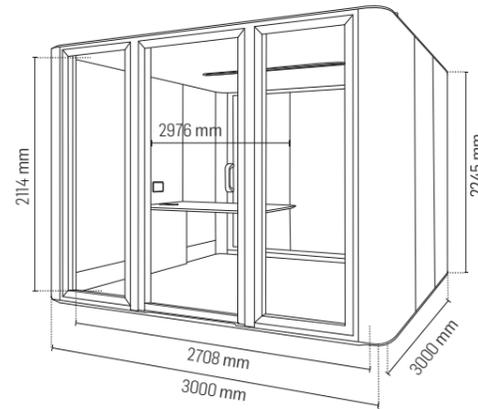

### MATERIALS

<b>Exterior</b>	Exterior panels: Made of thermocoated steel, replaceable in 10 available colors. Frame and door: Made of aluminum coated in matte black RAL 9005, with an invisible pivot hinge. Handle: Made of textured black polymer. Glass: Clear acoustic glass, 8 mm / 0.31 in.
<b>Interior</b>	Structure: Metal frame, wood, and recycled acoustic foam. Upholstery: 100% polyester fabric available in 12 colors. Flooring: 100% polyamide carpet available in 4 colors. Table: Top and lower box made of birch plywood covered with white, fingerprint-resistant black laminate, or wood imitation laminate.
<b>Standard furniture</b>	Table dimensions (8 people): 1800x1000x730 mm / 70.87x39.37x28.74 in Table height: 730 or 1050 mm / 28.74 or 41.34 in Maximum load for the table is 50 kg / 110.23 lbs Clothes hangers (4): coated in textured black RAL 9005.  Table dimensions (6 people): 1400x1000x730 mm / 55.12x39.37x28.74 in Table height: 730 ou 1050 mm / 28,74 ou 41,34 in Maximum load for the table is 50 kg / 110.23 lbs Clothes hangers (4): coated in textured black RAL 9005.
<b>Options PMR</b>	Support bars (1): located on the door, inside, with a height of 850mm / 33.46 in.   Protection plates (2): for the door, inside and outside 840x180mm / 33,07x7,09 in

Table for 8 people:





Table for 6 people:



## BUBLING R | TECHNICAL SPECIFICATIONS

### SAFETY

<b>Fire protection</b>	All coating materials, upholstery, and acoustic materials used in our products are tested and classified according to national or international standards.  Fabrics: EN 13501-1 Adhered Class B, s1, d0 Foams: ISO 3795 Carpet: EN 13501-1 Cf1 – s1 Wood: EN 13986, Class D-s2, d0
<b>Earthquake resistance</b>	The BUBLING can be supplied with a system that allows fixation to the floor, available for seismic regions.

### ENERGY


<b>Electrical equipment</b>	4x Schuko sockets - 230 V 1x USB-C port 1x USB-A port 1x RJ45 network socket Optional: HDMI port
<b>Standard consumption</b>	176 W
<b>Standby consumption</b>	0,98 W
<b>Equipment power</b>	AC output (electrical socket); 100-240 VAC, 16 A, 50-60 Hz.
<b>Charger output</b>	USB-C output 18 W

### FUNCIONALIDADES EXTRA

<b>Opcionais</b>	Metal hydraulic air spring for door closure.   Bubling Fresh Air, non-adjustable and noise-free system.   Metallic interior or exterior monitor support with VESA mount. Monitor not included. Maximum monitor size is 27 inches.   White writing board exterior or interior 1040x910 mm / 40.94x35.83 in
------------------	--

### SPACE AND INSTALLATION

<b>Required space</b>	BUBLING depth: 3000 mm / 118,11 in + Door opening of 100°. Minimum recommended space for air circulation above and on the sides: 150 mm / 5.91 in.
<b>Installation space</b>	A instalação requer 500 mm / 19,69 in de espaço livre ao redor da BUBLING.
<b>Assembly</b>	Assembly time: 4 hours Number of people: 3 people

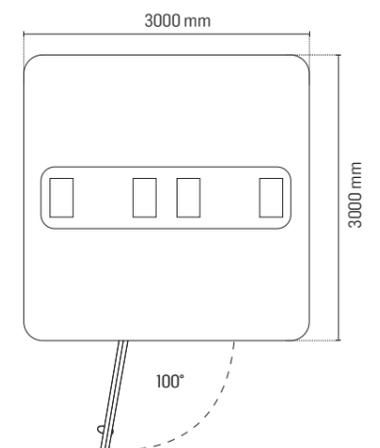

## FOR PEOPLE WITH REDUCED MOBILITY

# INCLUSIVE BUBLIING

The L, XL, and R models have been designed to be fully compatible with a wide range of accessories adapted for People with Reduced Mobility (PRM). This ensures that all users can enjoy an inclusive, safe, and comfortable environment, with solutions that meet specific mobility needs. These models ensure greater autonomy and accessibility, providing a functional and welcoming space for everyone.



### RETRACTABLE SOFA

Adapted table with a retractable mechanism that allows the table to be easily folded and stored for the entry of people with reduced mobility.



### RETRACTABLE TABLE

This system allows the sofa to be easily stored when not in use, ensuring greater flexibility in the space.



### ACCESS RAMP

The entry height for the BUBLIING is 23 mm / 0.91 in, ensuring easy access for all users. The door has an opening of 100°.



### SUPPORT BARS

Installed inside the BUBLIING at a height of 850 mm / 33.46 in to help users open and close the door more easily, providing ergonomic and secure support.



### PROTECTION PLATES

Located inside and outside the BUBLIING, they were designed to reinforce the safety and durability of the door glass, protecting against accidental impacts from wheelchairs.



All additional PMR options - Support Bars, Retractable Table, and Retractable Sofa - must be purchased together. Although the Access Ramp has been designed to facilitate the entry of people with reduced mobility, it is a standard feature of the L, XL, and R models.



A SPACE FOR EVERYONE  
 WE WANT TO ENSURE  
 YOUR COMFORT AND SUCESS,  
 WITH ALL THE RESOURCES.


## THE FINAL TOUCH TO HELP YOU DO MORE AND BETTER.

### COLORS AND FINISHES

#### INTERIOR FINISH

-  Beige  
CSE01
-  Light Gray  
CSE41
-  Charcoal Gray  
CSE13
-  Brown Beige  
CSE02
-  Tea Green  
CSE33
-  Olive Green  
CSE34
-  Light Blue  
CSE38
-  Navy Blue  
CSE40
-  Coral Red  
CSE24
-  Classic Red  
CSE29
-  Yellow  
CSE03
-  Mustard  
CSE31

#### EXTERIOR COATING

-  White  
RAL 9003 MATE
-  Light Gray  
RAL 9002 MATE
-  Dark Gray  
RAL 7039 MATE
-  Black  
RAL 9005 MATE
-  Dark Green  
RAL 6028 MATE
-  Light Green  
RAL 6021 MATE
-  Dark Blue  
RAL 5001 MATE
-  Light Blue  
RAL 5014 MATE
-  Red Beige  
RAL 3012 MATE
-  Beige  
RAL 1001 MATE

#### INTERIOR FLOORING

-  Beige  
393100
-  Light Gray  
393300
-  Dark gray  
393350
-  Brown  
327260

#### TABLETOP

-  Plywood with  
white laminated
-  Plywood with  
anti-fingerprint  
black laminated
-  Plywood with  
oak laminated

Projeta a tua BUBLING  
 no nosso website.  
[www.bubling.com](http://www.bubling.com)



## GUARANTEED PRIVACY

BUBLIING's are designed to create a quiet environment that enhances concentration and privacy.

Prioritizing natural acoustic comfort, the goal is not to achieve absolute silence but to reduce the impact of external noise, creating a balanced environment where privacy, comfort, and functionality coexist harmoniously.

With superior acoustic capabilities, we ensure that external noise doesn't disturb you and that your conversations aren't overheard outside the BUBLIING, providing a productive and focused workspace comparable to or even exceeding the comfort of remote work.

This balance offers users greater focus and productivity, without completely disconnecting them from their surroundings.

productivity, without completely disconnecting them from their surroundings.

The design of the BUBLIING uses high-performance acoustic materials. The interior of the booths is made up of sound-absorbing panels that provide a reverberation-free environment, glass, and a structure designed to enhance acoustic insulation, with walls made of high-performance recycled acoustic foam for superior efficiency.

**With a sound reduction of over 30dB, we ensure acoustic privacy according to the ISO 23351-1 testing method, one of the best industry ratings - Class A.**



## AUTOMATIC LIGHTING

The BUBLIING's offer an optimized work environment with advanced lighting features and automated adaptation.

Equipped with linear LED lighting, they can be adjusted in both intensity and color temperature, ranging from 3500K to 4000K, ensuring suitable lighting for different needs and times of the day. The S and Stwin models offer an optional adjustable face light for video calls.

Each BUBLIING is equipped with two LED presence indicators on the top, one on each side – Green or Red. This intuitive indicator allows users to quickly know whether the BUBLIING is occupied or available for use, promoting efficient management of shared spaces.



## ENHANCED VENTILATION

Integrated technology and a focus on the well-being of your employees are essential for creating work environments that foster collaboration, innovation, and connection.

BUBLIING features an **efficient ventilation system that meets the ventilation requirements for indoor commercial and service spaces.** The system was tested in an accredited laboratory, in accordance with ISO 12569:2017 standards, ensuring both the ventilation quality and the acoustic performance of BUBLIING.

In use mode, the air is renewed, on average, every 5.6 minutes. After each use, in standby mode, BUBLIING automatically activates the fans for 10 minutes to refresh the surrounding air, ensuring that the environment always has clean and fresh air.



## LIMITLESS CONNECTION

The BUBLIING's offer limitless connectivity, designed to facilitate use and integration in various environments. Each model is easily connected to a simple power outlet via a power cable and is ready to use.

Internally, they are equipped with at least one standard SCHUKO socket and one USB-C port.

The number of ports may vary from model to model, adjusted according to the occupancy capacity of each model.

Smaller models may have fewer ports, while larger models, such as the XL model, being even more versatile, also include an RJ45 port for Ethernet network connection. Additional input options can be added.



## INCLUSIVE BUBLIING

The BUBLIING's were designed with a strong commitment to accessibility and comfort.

The L and XL models do not have a podium and offer the PMR set, which includes: access ramp, retractable table and sofas, support bars, and protection panels.

The R model also offers the access ramp, support bars, and protection panels.

**This significantly facilitates the entry of people with reduced mobility,** ensuring that all users can enjoy a modern and efficient work environment, regardless of their physical needs.

This commitment to inclusion and well-being makes our BUBLIING's the ideal choice for any workspace, reflecting a universal and welcoming approach.

## | BUBLIING OPTIONS



**CASTERS**  
Optional for S / Stwin / M

Designed to support heavy loads, the casters ensure smooth and secure movement, allowing you to easily reposition the BUBLIING without the need for disassembly.




**AIR SPRING FOR DOOR**  
Optional for all models.

This mechanism uses hydraulic force to ensure that the doors remain closed smoothly and controlled, providing security and comfort to the users.



**MONITOR SUPPORT**  
Optional for M / L / XL / R.

Installed on the interior and/or exterior of the BUBLIING, depending on the model, the support is designed to hold monitors of various sizes, ensuring a secure and stable installation.

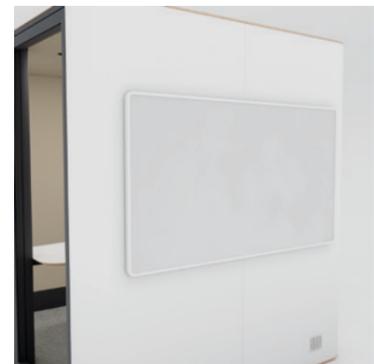

**WRITING BOARD**  
Optional for L / XL / R

It can be installed on the exterior of the BUBLIING (for models L and XL) with a frame painted in the same color finish as the exterior of the BUBLIING or another color of your choice. Alternatively, for the R model, it can be installed on the interior of the BUBLIING with a black-painted frame.



**INVISIBLE CHARGER**  
Optional for S / Stwin

Invisible and integrated into the desk, it allows the user to charge their phone wirelessly, eliminating the need for cables and providing a tidy and efficient work environment.



**FACE LIGHT**  
Optional for S / Stwin

It allows video calls to be made with the highest visual quality, regardless of ambient lighting conditions. This clear and professional lighting system provides a soft and even light.

## | BUBLIING OPTIONS



**LIFTING TABLE**  
Optional for S / Stwin

This height-adjustable system (730 mm-1200 mm) allows users to adjust the desk height according to their needs, promoting a correct and comfortable posture for both sitting and standing work.



**BUBLIING FRESH AIR**  
Optional for all models.

It is a non-adjustable system that includes a heat/cool pump, which provides a reduction of a few degrees in the air temperature as it is channeled through the system's cooling duct.



**CONTROL SCREEN**  
Optional for all models.

It allows you to adjust the lighting intensity and color (3500K-4000K). It also enables you to adjust the airflow, and for the models, it provides facial lighting and the option to turn the BUBLIING Fresh Air on or off. Additionally, it will inform you about the ambient temperature and the time.



### MAXIMIZE YOUR EXPERIENCE WITH BUBLIING. MAKE THE MOST OF ALL AVAILABLE FEATURES.

Each option and feature offers superior performance in comfort and efficiency, ensuring a personalized and optimized environment for all your needs. From the details of the finishes to the setup of the space, we want to make sure that your space is not only functional but also a reflection of your personal tastes and requirements.





## WE TRANSFORM SPACES WITH RESPONSIBILITY IN MIND.



### DURABILITY

BUBLIING's are built to last, using high-quality materials that undergo constant rigorous testing. Our robust and easy-to-maintain design ensures that BUBLIING's withstand the test of time, reducing the need for frequent replacements and minimizing waste.



### RENEWABLE AND RECYCLED MATERIALS

We prioritize the use of sustainable materials, such as certified wood and recyclable acoustic components. These materials are chosen to preserve natural resources and reduce the ecological footprint, without ever compromising the product's quality.



### PRODUÇÃO RESPONSÁVEL

We work with optimized manufacturing processes to minimize waste and reduce emissions. Additionally, we prioritize partnerships with suppliers who adopt good environmental practices and sustainable certifications.



### CIRCULARITY

We design our solutions with a focus on reuse and recycling. Whenever possible, we use modular materials and easily replaceable components, extending the product's lifespan and facilitating its repurposing at the end of its use cycle.



### ENERGY EFFICIENCY

We implement technologies such as LED lighting and low-energy sensors, which optimize energy use and reduce carbon emissions. This ensures that our BUBLIING's are both efficient and sustainable.



### LOGÍSTICA OTIMIZADA

We reduce our carbon footprint by optimizing the transportation and packaging of our products. We use recyclable packaging materials and strategies that minimize the transported volume, making the entire process more efficient and sustainable.









**BUBLIING** 

B.25.040\_03

Zona Industrial de Oiã, Lote B 28

Rua do Laranjo

3770-059 Oiã - PORTUGAL

(+351) 234 728 065

[bubliing@bubliing.com](mailto:bubliing@bubliing.com)

[www.bubliing.com](http://www.bubliing.com)